
# "T" CONNECTORS FOR HOLDERS



Phone: 888-654-9353 Fax: 937-253-2324 Email: sales@productionengineering.com

## "T" CONNECTORS FOR HOLDERS

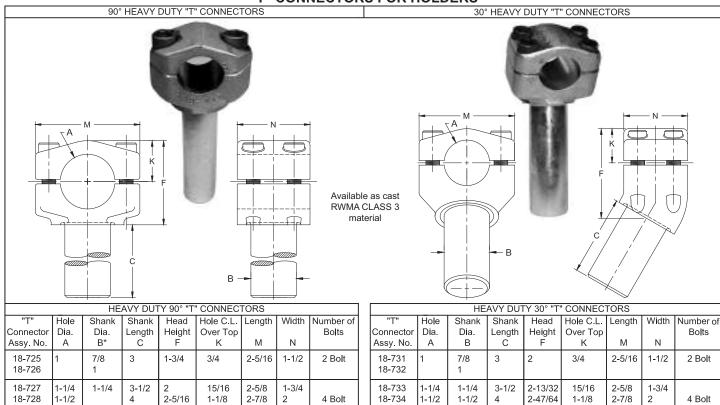

<sup>&</sup>quot;T" Connectors of other shank diameters and lengths may be ordered upon request.

2-5/16

1-1/8

2-7/8

2

## Available as cast RWMA CLASS 2 material

18-729

18-730

1-1/2

1-1/4

1-1/2

4

SMALL BARREL 90° "T" CONNECTORS							
"T"	Hole	Shank	Shank	Head	Hole C.L.	Dia.	Number of
Connector	Dia.	Dia.	Length	Height	Over Top		Bolts
Assy. No.	Α	В	С	F	K	М	
18-720 18-721	3/4	3/4 7/8	3	1-1/4	5/8	1-1/2	1 Bolt
18-722 18-723 18-724		1 1-1/4 1-1/2					

<sup>&</sup>quot;T" Connectors of other shank diameters and lengths may be ordered upon request.

# C B

Connectors. See page 38 for suggested setups.

These 30° "T" Connectors may be interchanged with the 90° universal type "T"



### THREADED SOCKET(OR BUTTON) ELECTRODES

(USE WITH 900 AND 950 SERIES HOLDERS ON PAGE 48) ALL DIMENSIONS WITH AN (\*) ARE COMMON TO EACH CAP IN A HORIZONTAL LINE.

