


J3/4 MOUNT CYLINDERS (1.75" - 3.00" BORE)

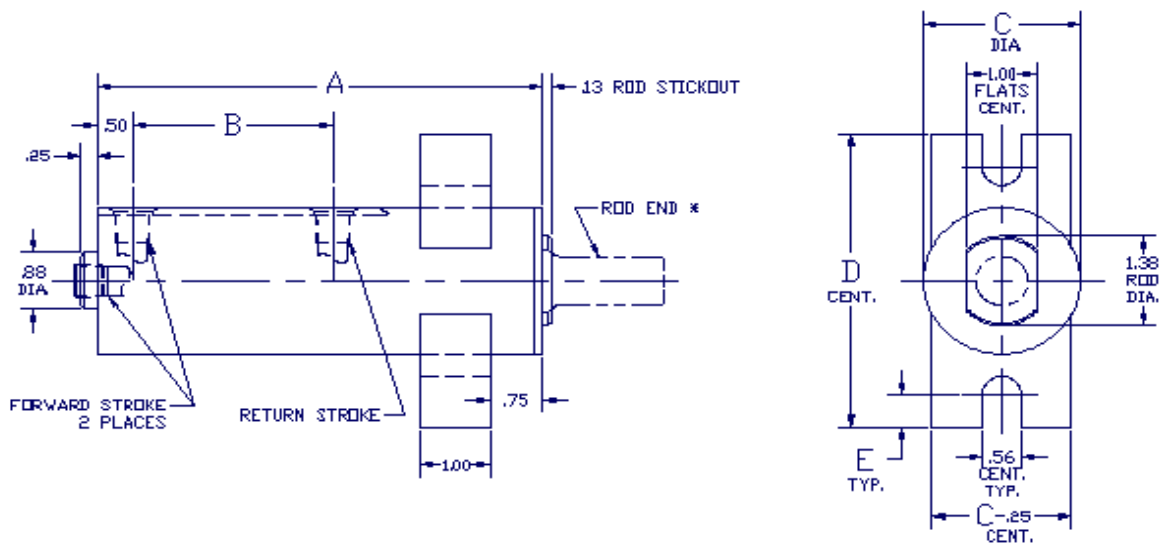

DUAL PISTON CYLINDERS							PISTON AREA	
MODEL NO.	STROKE	A	B	C	D & E	EXT.	RET.	
AC-J3/4-G-436-4*	1.00	5.38	2.38	2.00	D			
AC-J3/4-G-436-6*	1.50	6.38	2.88		4.50	4.36	1.96	
AC-J3/4-G-436-8*	2.00	7.38	3.38			SQ. IN.	SQ. IN.	
AC-J3/4-G-436-12*	3.00	9.38	4.38		E			
AC-J3/4-G-436-16*	4.00	11.38	5.38		.50			
AC-J3/4-G-584-4*	1.00	5.38	2.38	2.25	D			
AC-J3/4-G-584-6*	1.50	6.38	2.88		4.50	5.84	2.70	
AC-J3/4-G-584-8*	2.00	7.38	3.38			SQ. IN.	SQ. IN.	
AC-J3/4-G-584-12*	3.00	9.38	4.38		E			
AC-J3/4-G-584-16*	4.00	11.38	5.38		.50			
AC-J3/4-G-750-4*	1.00	5.38	2.38	2.50	D			
AC-J3/4-G-750-6*	1.50	6.38	2.88		5.50	7.50	3.53	
AC-J3/4-G-750-8*	2.00	7.38	3.38			SQ. IN.	SQ. IN.	
AC-J3/4-G-750-12*	3.00	9.38	4.38		E			
AC-J3/4-G-750-16*	4.00	11.38	5.38		.75			
AC-J3/4-G-937-4*	1.00	5.38	2.38	2.75	D			
AC-J3/4-G-937-6*	1.50	6.38	2.88		5.50	9.37	4.46	
AC-J3/4-G-937-8*	2.00	7.38	3.38			SQ. IN.	SQ. IN.	
AC-J3/4-G-937-12*	3.00	9.38	4.38		E			
AC-J3/4-G-937-16*	4.00	11.38	5.38		.75			
AC-J3/4-G-1143-4*	1.00	5.38	2.38	3.00	D			
AC-J3/4-G-1143-6*	1.50	6.38	2.88		5.75	11.43	5.50	
AC-J3/4-G-1143-8*	2.00	7.38	3.38			SQ. IN.	SQ. IN.	
AC-J3/4-G-1143-12*	3.00	9.38	4.38		E			
AC-J3/4-G-1143-16*	4.00	11.38	5.38		.69			
AC-J3/4-G-1360-4*	1.00	5.38	2.38	3.25	D			
AC-J3/4-G-1360-6*	1.50	6.38	2.88		5.75	13.60	6.63	
AC-J3/4-G-1360-8*	2.00	7.38	3.38			SQ. IN.	SQ. IN.	
AC-J3/4-G-1360-12*	3.00	9.38	4.38		E			
AC-J3/4-G-1360-16*	4.00	11.38	5.38		.62			

TRIPLE PISTON CYLINDERS							PISTON AREA	
MODEL NO.	STROKE	A	B	C	D & E	EXT.	RET.	
AC-J3/4-G-620-4*	1.00	7.38	2.38	2.00	D			
AC-J3/4-G-620-6*	1.50	8.88	2.88		4.50	6.20	1.96	
AC-J3/4-G-620-8*	2.00	10.38	3.38			SQ. IN.	SQ. IN.	
AC-J3/4-G-620-12*	3.00	13.38	4.38		E			
AC-J3/4-G-620-16*	4.00	16.38	5.38		.50			
AC-J3/4-G-840-4*	1.00	7.38	2.38	2.25	D			
AC-J3/4-G-840-6*	1.50	8.88	2.88		4.50	8.40	2.70	
AC-J3/4-G-840-8*	2.00	10.38	3.38			SQ. IN.	SQ. IN.	
AC-J3/4-G-840-12*	3.00	13.38	4.38		E			
AC-J3/4-G-840-16*	4.00	16.38	5.38		.50			
AC-J3/4-G-1087-4*	1.00	7.38	2.38	2.50	D			
AC-J3/4-G-1087-6*	1.50	8.88	2.88		5.50	10.87	3.53	
AC-J3/4-G-1087-8*	2.00	10.38	3.38			SQ. IN.	SQ. IN.	
AC-J3/4-G-1087-12*	3.00	13.38	4.38		E			
AC-J3/4-G-1087-16*	4.00	16.38	5.38		.75			
AC-J3/4-G-1370-4*	1.00	7.38	2.38	2.75	D			
AC-J3/4-G-1370-6*	1.50	8.88	2.88		5.50	13.70	4.46	
AC-J3/4-G-1370-8*	2.00	10.38	3.38			SQ. IN.	SQ. IN.	
AC-J3/4-G-1370-12*	3.00	13.38	4.38		E			
AC-J3/4-G-1370-16*	4.00	16.38	5.38		.75			
AC-J3/4-G-1680-4*	1.00	7.38	2.38	3.00	D			
AC-J3/4-G-1680-6*	1.50	8.88	2.88		5.75	16.80	5.50	
AC-J3/4-G-1680-8*	2.00	10.38	3.38			SQ. IN.	SQ. IN.	
AC-J3/4-G-1680-12*	3.00	13.38	4.38		E			
AC-J3/4-G-1680-16*	4.00	16.38	5.38		.69			
AC-J3/4-G-2010-4*	1.00	7.38	2.38	3.25	D			
AC-J3/4-G-2010-6*	1.50	8.88	2.88		5.75	20.10	6.63	
AC-J3/4-G-2010-8*	2.00	10.38	3.38			SQ. IN.	SQ. IN.	
AC-J3/4-G-2010-12*	3.00	13.38	4.38		E			
AC-J3/4-G-2010-16*	4.00	16.38	5.38		.62			

* ADD ROD END STYLE (SEE PAGE 1 FOR OPTIONS)

ADDITIONAL STROKE LENGTHS ARE AVAILABLE IN .50" INCREMENTS

ALL PORTS 1/4-18 STANDARD PIPE TAP

Phone: (888) 654-9353

www.resistanceweldsupplies.com

PAGE 9