
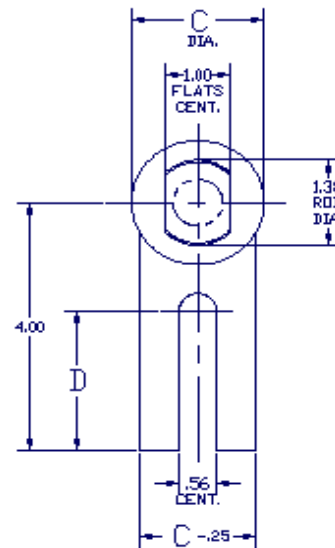


B3/4 MOUNT CYLINDERS (1.75" - 3.00" BORE)

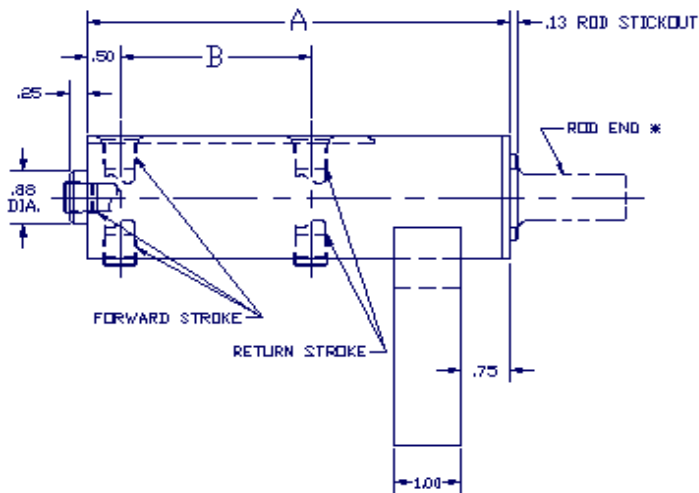

DUAL PISTON CYLINDERS							PISTON AREA	
MODEL NO.	STROKE	A	B	C	D	EXT.	RET.	
AC-B3/4-G-436-4*	1.00	5.38	2.38	2.00	2.25	4.36 SQ. IN.	1.96 SQ. IN.	
AC-B3/4-G-436-6*	1.50	6.38	2.88					
AC-B3/4-G-436-8*	2.00	7.38	3.38					
AC-B3/4-G-436-12*	3.00	9.38	4.38					
AC-B3/4-G-436-16*	4.00	11.38	5.38					
AC-B3/4-G-584-4*	1.00	5.38	2.38	2.25	2.25	5.84 SQ. IN.	2.70 SQ. IN.	
AC-B3/4-G-584-6*	1.50	6.38	2.88					
AC-B3/4-G-584-8*	2.00	7.38	3.38					
AC-B3/4-G-584-12*	3.00	9.38	4.38					
AC-B3/4-G-584-16*	4.00	11.38	5.38					
AC-B3/4-G-750-4*	1.00	5.38	2.38	2.50	2.25	7.50 SQ. IN.	3.53 SQ. IN.	
AC-B3/4-G-750-6*	1.50	6.38	2.88					
AC-B3/4-G-750-8*	2.00	7.38	3.38					
AC-B3/4-G-750-12*	3.00	9.38	4.38					
AC-B3/4-G-750-16*	4.00	11.38	5.38					
AC-B3/4-G-937-4*	1.00	5.38	2.38	2.75	2.00	9.37 SQ. IN.	4.46 SQ. IN.	
AC-B3/4-G-937-6*	1.50	6.38	2.88					
AC-B3/4-G-937-8*	2.00	7.38	3.38					
AC-B3/4-G-937-12*	3.00	9.38	4.38					
AC-B3/4-G-937-16*	4.00	11.38	5.38					
AC-B3/4-G-1143-4*	1.00	5.38	2.38	3.00	1.88	11.43 SQ. IN.	5.50 SQ. IN.	
AC-B3/4-G-1143-6*	1.50	6.38	2.88					
AC-B3/4-G-1143-8*	2.00	7.38	3.38					
AC-B3/4-G-1143-12*	3.00	9.38	4.38					
AC-B3/4-G-1143-16*	4.00	11.38	5.38					
AC-B3/4-G-1360-4*	1.00	5.38	2.38	3.25	1.75	13.60 SQ. IN.	6.63 SQ. IN.	
AC-B3/4-G-1360-6*	1.50	6.38	2.88					
AC-B3/4-G-1360-8*	2.00	7.38	3.38					
AC-B3/4-G-1360-12*	3.00	9.38	4.38					
AC-B3/4-G-1360-16*	4.00	11.38	5.38					

TRIPLE PISTON CYLINDERS							PISTON AREA	
MODEL NO.	STROKE	A	B	C	D	EXT.	RET.	
AC-B3/4-G3-620-4*	1.00	7.38	2.38	2.00	2.25	6.20 SQ. IN.	1.96 SQ. IN.	
AC-B3/4-G3-620-6*	1.50	8.88	2.88					
AC-B3/4-G3-620-8*	2.00	10.38	3.38					
AC-B3/4-G3-620-12*	3.00	13.38	4.38					
AC-B3/4-G3-620-16*	4.00	16.38	5.38					
AC-B3/4-G3-840-4*	1.00	7.38	2.38	2.25	2.25	8.40 SQ. IN.	2.70 SQ. IN.	
AC-B3/4-G3-840-6*	1.50	8.88	2.88					
AC-B3/4-G3-840-8*	2.00	10.38	3.38					
AC-B3/4-G3-840-12*	3.00	13.38	4.38					
AC-B3/4-G3-840-16*	4.00	16.38	5.38					
AC-B3/4-G3-1087-4*	1.00	7.38	2.38	2.50	2.25	10.87 SQ. IN.	3.53 SQ. IN.	
AC-B3/4-G3-1087-6*	1.50	8.88	2.88					
AC-B3/4-G3-1087-8*	2.00	10.38	3.38					
AC-B3/4-G3-1087-12*	3.00	13.38	4.38					
AC-B3/4-G3-1087-16*	4.00	16.38	5.38					
AC-B3/4-G3-1370-4*	1.00	7.38	2.38	2.75	2.00	13.70 SQ. IN.	4.46 SQ. IN.	
AC-B3/4-G3-1370-6*	1.50	8.88	2.88					
AC-B3/4-G3-1370-8*	2.00	10.38	3.38					
AC-B3/4-G3-1370-12*	3.00	13.38	4.38					
AC-B3/4-G3-1370-16*	4.00	16.38	5.38					
AC-B3/4-G3-1680-4*	1.00	7.38	2.38	3.00	1.88	16.80 SQ. IN.	5.50 SQ. IN.	
AC-B3/4-G3-1680-6*	1.50	8.88	2.88					
AC-B3/4-G3-1680-8*	2.00	10.38	3.38					
AC-B3/4-G3-1680-12*	3.00	13.38	4.38					
AC-B3/4-G3-1680-16*	4.00	16.38	5.38					
AC-B3/4-G3-2010-4*	1.00	7.38	2.38	3.25	1.75	20.10 SQ. IN.	6.63 SQ. IN.	
AC-B3/4-G3-2010-6*	1.50	8.88	2.88					
AC-B3/4-G3-2010-8*	2.00	10.38	3.38					
AC-B3/4-G3-2010-12*	3.00	13.38	4.38					
AC-B3/4-G3-2010-16*	4.00	16.38	5.38					

* ADD ROD END STYLE (SEE PAGE 1 FOR OPTIONS)

ADDITIONAL STROKE LENGTHS ARE AVAILABLE IN .50" INCREMENTS

ALL PORTS 1/4-18 STANDARD PIPE TAP

Phone: (888) 654-9353

www.resistanceweldsupplies.com

PAGE 4