

ADVANCED CYLINDER PRODUCTS

THE LEADER IN PNEUMATIC CYLINDERS



MEDIUM AND HEAVY DUTY CYLINDERS

1344 Woodman Drive
Dayton, OH 45432
PHONE: 888-654-9353
FAX: 1-937-253-2324

ACP MEDIUM AND HEAVY DUTY CYLINDERS

This catalog includes dual and triple piston cylinders that are considered medium and heavy duty. Medium and heavy duty cylinders have bore sizes ranging from 3.25 inches up to and including 6 inches.

ALONG WITH THE CYLINDERS OFFERED IN THIS CATALOG
ADVANCED CYLINDER PRODUCTS ALSO OFFERS:


- DUAL AND TRIPLE PISTON CYLINDERS 1 ¾" THROUGH 3.00" BORE
- AUTOMOTIVE DESIGN CYLINDERS
- PRE-LUBE CYLINDERS
- RETRACT CYLINDERS
- HYDRAULIC CYLINDERS
- ASSIST STYLE CYLINDERS
- CYLINDER REPAIR FOR ALL MAKES AND MODELS
- PART REPLACEMENT FOR ALL CYLINDERS
- REPAIR KITS
- IN-HOUSE ENGINEERING
- REVERSE ENGINEERING CAPABILITY
- ALL INDUSTRY MOUNTS AVAILABLE
- 100% QUALITY
- ALL PRODUCTS WARANTEED

Phone: (888) 654-9353


www.resistanceweldsupplies.com

ACP PNEUMATIC CYLINDERS (ROD END SHEET)


A




D

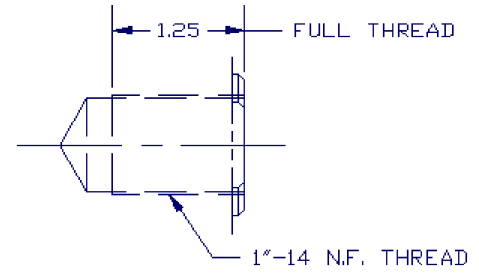


G

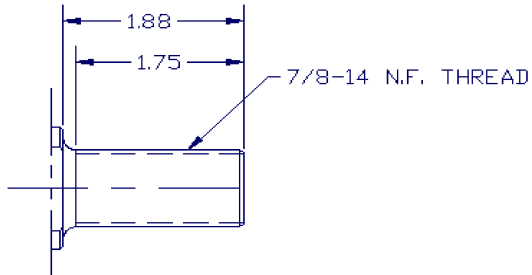


L

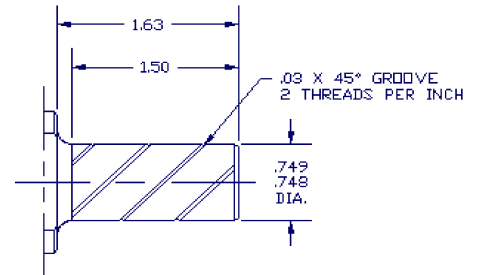


N

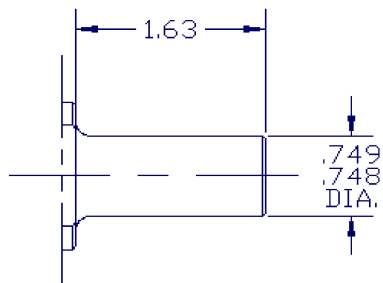


N6




N6+




N202

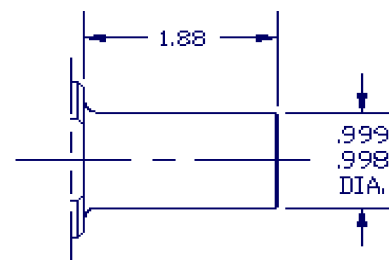


N263



N263+



A MOUNT CYLINDERS (3.25" - 4.00" BORE) (MEDIUM DUTY)

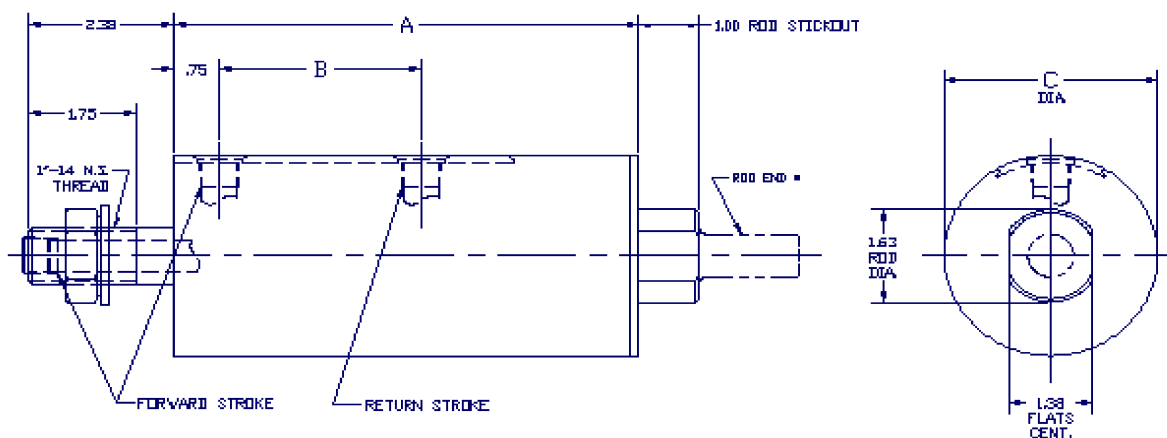

DUAL PISTON CYLINDERS					PISTON AREA	
MODEL NO.	STROKE	A	B	C	EXT.	RET.
AC-A-G-1575-4*	1.00	6.62	2.81	3.50	15.81 SQ. IN.	7.51 SQ. IN.
AC-A-G-1575-6*	1.50	7.62	3.31			
AC-A-G-1575-8*	2.00	8.62	3.81			
AC-A-G-1575-12*	3.00	10.62	4.81			
AC-A-G-1575-16*	4.00	12.62	5.81			
AC-A-G-1575-20*	5.00	14.62	6.81			
AC-A-G-1575-24*	6.00	16.62	7.81			
AC-A-G-1840-4*	1.00	6.62	2.81	3.75	18.46 SQ. IN.	8.84 SQ. IN.
AC-A-G-1840-6*	1.50	7.62	3.31			
AC-A-G-1840-8*	2.00	8.62	3.81			
AC-A-G-1840-12*	3.00	10.62	4.81			
AC-A-G-1840-16*	4.00	12.62	5.81			
AC-A-G-1840-20*	5.00	14.62	6.81			
AC-A-G-1840-24*	6.00	16.62	7.81			
AC-A-G-2125-4*	1.00	6.62	2.81	4.00	21.30 SQ. IN.	10.26 SQ. IN.
AC-A-G-2125-6*	1.50	7.62	3.31			
AC-A-G-2125-8*	2.00	8.62	3.81			
AC-A-G-2125-12*	3.00	10.62	4.81			
AC-A-G-2125-16*	4.00	12.62	5.81			
AC-A-G-2125-20*	5.00	14.62	6.81			
AC-A-G-2125-24*	6.00	16.62	7.81			
AC-A-G-2430-4*	1.00	6.62	2.81	4.25	24.35 SQ. IN.	11.78 SQ. IN.
AC-A-G-2430-6*	1.50	7.62	3.31			
AC-A-G-2430-8*	2.00	8.62	3.81			
AC-A-G-2430-12*	3.00	10.62	4.81			
AC-A-G-2430-16*	4.00	12.62	5.81			
AC-A-G-2430-20*	5.00	14.62	6.81			
AC-A-G-2430-24*	6.00	16.62	7.81			

TRIPLE PISTON CYLINDERS					PISTON AREA	
MODEL NO.	STROKE	A	B	C	EXT.	RET.
AC-A-E3-2320-4*	1.00	9.12	2.81	3.50	22.99 SQ. IN.	7.51 SQ. IN.
AC-A-E3-2320-6*	1.50	10.62	3.31			
AC-A-E3-2320-8*	2.00	12.12	3.81			
AC-A-E3-2320-12*	3.00	15.12	4.81			
AC-A-E3-2320-16*	4.00	18.12	5.81			
AC-A-E3-2320-20*	5.00	21.12	6.81			
AC-A-E3-2320-24*	6.00	24.12	7.81			
AC-A-E3-2710-4*	1.00	9.12	2.81	3.75	26.97 SQ. IN.	8.84 SQ. IN.
AC-A-E3-2710-6*	1.50	10.62	3.31			
AC-A-E3-2710-8*	2.00	12.12	3.81			
AC-A-E3-2710-12*	3.00	15.12	4.81			
AC-A-E3-2710-16*	4.00	18.12	5.81			
AC-A-E3-2710-20*	5.00	21.12	6.81			
AC-A-E3-2710-24*	6.00	24.12	7.81			
AC-A-E3-3140-4*	1.00	9.12	2.81	4.00	31.24 SQ. IN.	10.26 SQ. IN.
AC-A-E3-3140-6*	1.50	10.62	3.31			
AC-A-E3-3140-8*	2.00	12.12	3.81			
AC-A-E3-3140-12*	3.00	15.12	4.81			
AC-A-E3-3140-16*	4.00	18.12	5.81			
AC-A-E3-3140-20*	5.00	21.12	6.81			
AC-A-E3-3140-24*	6.00	24.12	7.81			
AC-A-E3-3600-4*	1.00	9.12	2.81	4.25	35.81 SQ. IN.	11.78 SQ. IN.
AC-A-E3-3600-6*	1.50	10.62	3.31			
AC-A-E3-3600-8*	2.00	12.12	3.81			
AC-A-E3-3600-12*	3.00	15.12	4.81			
AC-A-E3-3600-16*	4.00	18.12	5.81			
AC-A-E3-3600-20*	5.00	21.12	6.81			
AC-A-E3-3600-24*	6.00	24.12	7.81			

* ADD ROD END STYLE (SEE PAGE 1 FOR OPTIONS)

ADDITIONAL STROKE LENGTHS ARE AVAILABLE IN .50" INCREMENTS


ALL PORTS 3/8-18 STANDARD PIPE TAP

Phone: (888) 654-9353

www.resistanceweldsupplies.com

PAGE 2

A MOUNT CYLINDERS (4.50" - 6.00" BORE) (HEAVY DUTY)

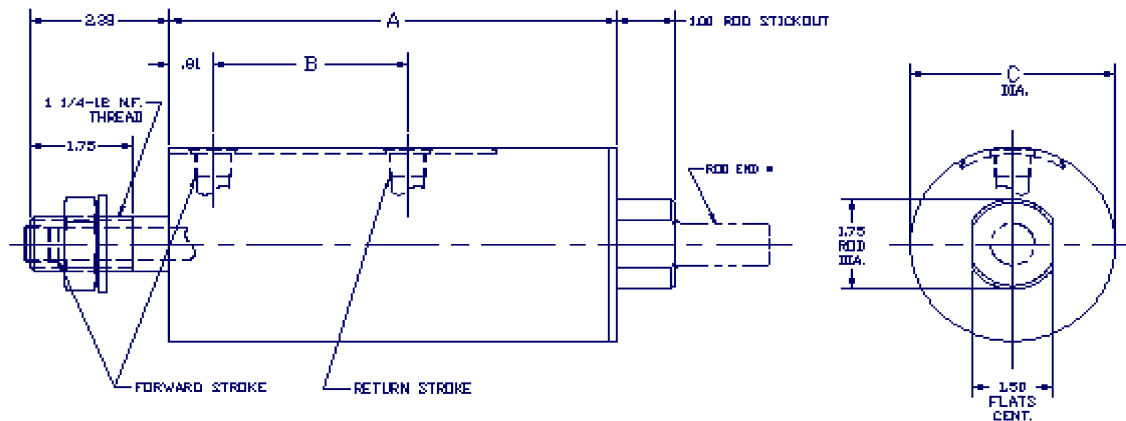

DUAL PISTON CYLINDERS					PISTON AREA	
MODEL NO.	STROKE	A	B	C	EXT.	RET.
AC-A-G-3030-4*	1.00	7.38	3.25	5.00	30.58 SQ. IN.	14.68 SQ. IN.
AC-A-G-3030-6*	1.50	8.38	3.75			
AC-A-G-3030-8*	2.00	9.38	4.25			
AC-A-G-3030-12*	3.00	11.38	5.25			
AC-A-G-3030-16*	4.00	13.38	6.25			
AC-A-G-3030-20*	5.00	15.38	7.25			
AC-A-G-3030-24*	6.00	17.38	8.25			
AC-A-G-3770-4*	1.00	7.38	3.25	5.50	38.04 SQ. IN.	18.41 SQ. IN.
AC-A-G-3770-6*	1.50	8.38	3.75			
AC-A-G-3770-8*	2.00	9.38	4.25			
AC-A-G-3770-12*	3.00	11.38	5.25			
AC-A-G-3770-16*	4.00	13.38	6.25			
AC-A-G-3770-20*	5.00	15.38	7.25			
AC-A-G-3770-24*	6.00	17.38	8.25			
AC-A-G-4600-4*	1.00	7.38	3.25	6.00	46.29 SQ. IN.	22.53 SQ. IN.
AC-A-G-4600-6*	1.50	8.38	3.75			
AC-A-G-4600-8*	2.00	9.38	4.25			
AC-A-G-4600-12*	3.00	11.38	5.25			
AC-A-G-4600-16*	4.00	13.38	6.25			
AC-A-G-4600-20*	5.00	15.38	7.25			
AC-A-G-4600-24*	6.00	17.38	8.25			
AC-A-G-5500-4*	1.00	7.38	3.25	6.50	55.32 SQ. IN.	27.05 SQ. IN.
AC-A-G-5500-6*	1.50	8.38	3.75			
AC-A-G-5500-8*	2.00	9.38	4.25			
AC-A-G-5500-12*	3.00	11.38	5.25			
AC-A-G-5500-16*	4.00	13.38	6.25			
AC-A-G-5500-20*	5.00	15.38	7.25			
AC-A-G-5500-24*	6.00	17.38	8.25			

TRIPLE PISTON CYLINDERS					PISTON AREA	
MODEL NO.	STROKE	A	B	C	EXT.	RET.
AC-A-E3-4450-4*	1.00	10.12	3.25	5.00	44.86 SQ. IN.	14.68 SQ. IN.
AC-A-E3-4450-6*	1.50	11.62	3.75			
AC-A-E3-4450-8*	2.00	13.12	4.25			
AC-A-E3-4450-12*	3.00	16.12	5.25			
AC-A-E3-4450-16*	4.00	19.12	6.25			
AC-A-E3-4450-20*	5.00	22.12	7.25			
AC-A-E3-4450-24*	6.00	25.12	8.25			
AC-A-E3-5550-4*	1.00	10.12	3.25	5.50	56.05 SQ. IN.	18.41 SQ. IN.
AC-A-E3-5550-6*	1.50	11.62	3.75			
AC-A-E3-5550-8*	2.00	13.12	4.25			
AC-A-E3-5550-12*	3.00	16.12	5.25			
AC-A-E3-5550-16*	4.00	19.12	6.25			
AC-A-E3-5550-20*	5.00	22.12	7.25			
AC-A-E3-5550-24*	6.00	25.12	8.25			
AC-A-E3-6800-4*	1.00	10.12	3.25	6.00	68.42 SQ. IN.	22.53 SQ. IN.
AC-A-E3-6800-6*	1.50	11.62	3.75			
AC-A-E3-6800-8*	2.00	13.12	4.25			
AC-A-E3-6800-12*	3.00	16.12	5.25			
AC-A-E3-6800-16*	4.00	19.12	6.25			
AC-A-E3-6800-20*	5.00	22.12	7.25			
AC-A-E3-6800-24*	6.00	25.12	8.25			
AC-A-E3-8150-4*	1.00	10.12	3.25	6.50	81.97 SQ. IN.	11.78 SQ. IN.
AC-A-E3-8150-6*	1.50	11.62	3.75			
AC-A-E3-8150-8*	2.00	13.12	4.25			
AC-A-E3-8150-12*	3.00	16.12	5.25			
AC-A-E3-8150-16*	4.00	19.12	6.25			
AC-A-E3-8150-20*	5.00	22.12	7.25			
AC-A-E3-8150-24*	6.00	25.12	8.25			

* ADD ROD END STYLE (SEE PAGE 1 FOR OPTIONS)

ADDITIONAL STROKE LENGTHS ARE AVAILABLE IN .50" INCREMENTS



ALL PORTS 1/2-14 STANDARD PIPE TAP

Phone: (888) 654-9353

www.resistanceweldsupplies.com

PAGE 3

C MOUNT CYLINDERS (3.25" - 4.00" BORE) (MEDIUM DUTY)

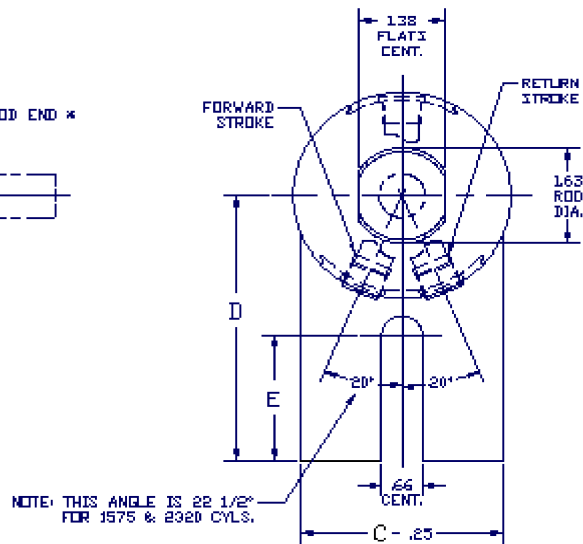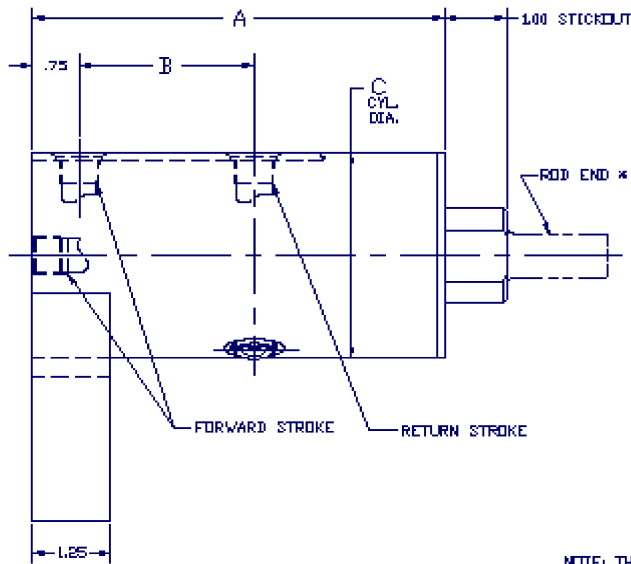

NOTE: THIS ANGLE IS 22 1/2° FOR 1575 & 2320 CYLS.

DUAL PISTON CYLINDERS							PISTON AREA	
MODEL NO.	STROKE	A	B	C	D	E	EXT.	RET.
AC-C-G-1575-4*	1.00	6.62	2.81	3.50	4.50	2.12	15.81 SQ. IN.	7.51 SQ. IN.
AC-C-G-1575-6*	1.50	7.62	3.31					
AC-C-G-1575-8*	2.00	8.62	3.81					
AC-C-G-1575-12*	3.00	10.62	4.81					
AC-C-G-1575-16*	4.00	12.62	5.81					
AC-C-G-1575-20*	5.00	14.62	6.81					
AC-C-G-1575-24*	6.00	16.62	7.81					
AC-C-G-1840-4*	1.00	6.62	2.81	3.75	4.50	2.12	18.46 SQ. IN.	8.84 SQ. IN.
AC-C-G-1840-6*	1.50	7.62	3.31					
AC-C-G-1840-8*	2.00	8.62	3.81					
AC-C-G-1840-12*	3.00	10.62	4.81					
AC-C-G-1840-16*	4.00	12.62	5.81					
AC-C-G-1840-20*	5.00	14.62	6.81					
AC-C-G-1840-24*	6.00	16.62	7.81					
AC-C-G-2125-4*	1.00	6.62	2.81	4.00	5.00	2.25	21.30 SQ. IN.	10.26 SQ. IN.
AC-C-G-2125-6*	1.50	7.62	3.31					
AC-C-G-2125-8*	2.00	8.62	3.81					
AC-C-G-2125-12*	3.00	10.62	4.81					
AC-C-G-2125-16*	4.00	12.62	5.81					
AC-C-G-2125-20*	5.00	14.62	6.81					
AC-C-G-2125-24*	6.00	16.62	7.81					
AC-C-G-2430-4*	1.00	6.62	2.81	4.25	5.00	2.25	24.35 SQ. IN.	11.78 SQ. IN.
AC-C-G-2430-6*	1.50	7.62	3.31					
AC-C-G-2430-8*	2.00	8.62	3.81					
AC-C-G-2430-12*	3.00	10.62	4.81					
AC-C-G-2430-16*	4.00	12.62	5.81					
AC-C-G-2430-20*	5.00	14.62	6.81					
AC-C-G-2430-24*	6.00	16.62	7.81					

TRIPLE PISTON CYLINDERS							PISTON AREA	
MODEL NO.	STROKE	A	B	C	D	E	EXT.	RET.
AC-C-E3-2320-4*	1.00	9.12	2.81	3.50	4.50	2.12	22.99 SQ. IN.	7.51 SQ. IN.
AC-C-E3-2320-6*	1.50	10.62	3.31					
AC-C-E3-2320-8*	2.00	12.12	3.81					
AC-C-E3-2320-12*	3.00	15.12	4.81					
AC-C-E3-2320-16*	4.00	18.12	5.81					
AC-C-E3-2320-20*	5.00	21.12	6.81					
AC-C-E3-2320-24*	6.00	24.12	7.81					
AC-C-E3-2710-4*	1.00	9.12	2.81	3.75	4.50	2.12	26.97 SQ. IN.	8.84 SQ. IN.
AC-C-E3-2710-6*	1.50	10.62	3.31					
AC-C-E3-2710-8*	2.00	12.12	3.81					
AC-C-E3-2710-12*	3.00	15.12	4.81					
AC-C-E3-2710-16*	4.00	18.12	5.81					
AC-C-E3-2710-20*	5.00	21.12	6.81					
AC-C-E3-2710-24*	6.00	24.12	7.81					
AC-C-E3-3140-4*	1.00	9.12	2.81	4.00	5.00	2.25	31.24 SQ. IN.	10.26 SQ. IN.
AC-C-E3-3140-6*	1.50	10.62	3.31					
AC-C-E3-3140-8*	2.00	12.12	3.81					
AC-C-E3-3140-12*	3.00	15.12	4.81					
AC-C-E3-3140-16*	4.00	18.12	5.81					
AC-C-E3-3140-20*	5.00	21.12	6.81					
AC-C-E3-3140-24*	6.00	24.12	7.81					
AC-C-E3-3600-4*	1.00	9.12	2.81	4.25	5.00	2.25	35.81 SQ. IN.	11.78 SQ. IN.
AC-C-E3-3600-6*	1.50	10.62	3.31					
AC-C-E3-3600-8*	2.00	12.12	3.81					
AC-C-E3-3600-12*	3.00	15.12	4.81					
AC-C-E3-3600-16*	4.00	18.12	5.81					
AC-C-E3-3600-20*	5.00	21.12	6.81					
AC-C-E3-3600-24*	6.00	24.12	7.81					

* ADD ROD END STYLE (SEE PAGE 1 FOR OPTIONS)

ADDITIONAL STROKE LENGTHS ARE AVAILABLE IN .50" INCREMENTS



ALL PORTS 3/8-18 STANDARD PIPE TAP

Phone: (888) 654-9353

www.resistanceweldsupplies.com

PAGE 4

C MOUNT CYLINDERS (4.50" - 6.00" BORE) (HEAVY DUTY)

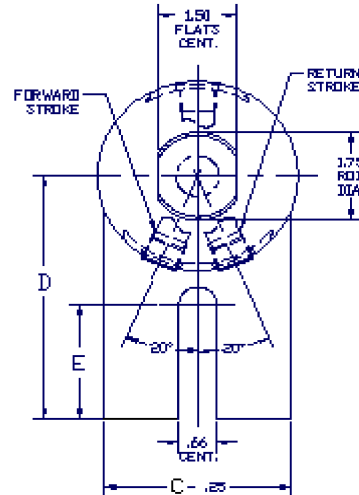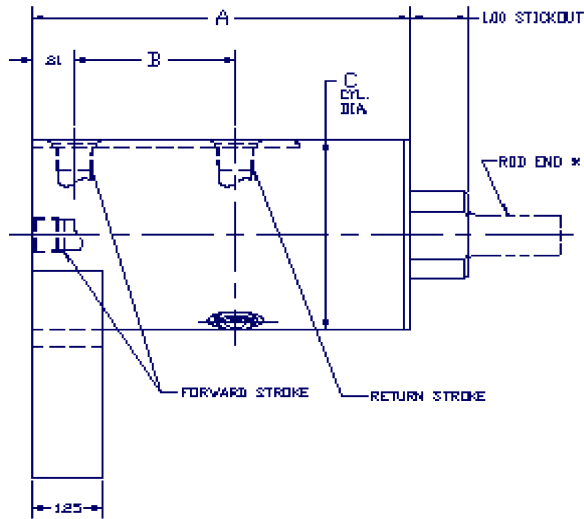

DUAL PISTON CYLINDERS							PISTON AREA	
MODEL NO.	STROKE	A	B	C	D	E	EXT.	RET.
AC-C-G-3030-4*	1.00	7.38	3.25	5.00	5.50	2.25	30.58	14.68
AC-C-G-3030-6*	1.50	8.38	3.75					
AC-C-G-3030-8*	2.00	9.38	4.25					
AC-C-G-3030-12*	3.00	11.38	5.25					
AC-C-G-3030-16*	4.00	13.38	6.25					
AC-C-G-3030-20*	5.00	15.38	7.25					
AC-C-G-3030-24*	6.00	17.38	8.25					
AC-C-G-3770-4*	1.00	7.38	3.25	5.50	5.50	2.25	38.04	18.41
AC-C-G-3770-6*	1.50	8.38	3.75					
AC-C-G-3770-8*	2.00	9.38	4.25					
AC-C-G-3770-12*	3.00	11.38	5.25					
AC-C-G-3770-16*	4.00	13.38	6.25					
AC-C-G-3770-20*	5.00	15.38	7.25					
AC-C-G-3770-24*	6.00	17.38	8.25					
AC-C-G-4600-4*	1.00	7.38	3.25	6.00	6.00	2.25	46.29	22.53
AC-C-G-4600-6*	1.50	8.38	3.75					
AC-C-G-4600-8*	2.00	9.38	4.25					
AC-C-G-4600-12*	3.00	11.38	5.25					
AC-C-G-4600-16*	4.00	13.38	6.25					
AC-C-G-4600-20*	5.00	15.38	7.25					
AC-C-G-4600-24*	6.00	17.38	8.25					
AC-C-G-5500-4*	1.00	7.38	3.25	6.50	6.00	2.25	55.32	27.05
AC-C-G-5500-6*	1.50	8.38	3.75					
AC-C-G-5500-8*	2.00	9.38	4.25					
AC-C-G-5500-12*	3.00	11.38	5.25					
AC-C-G-5500-16*	4.00	13.38	6.25					
AC-C-G-5500-20*	5.00	15.38	7.25					
AC-C-G-5500-24*	6.00	17.38	8.25					

TRIPLE PISTON CYLINDERS							PISTON AREA	
MODEL NO.	STROKE	A	B	C	D	E	EXT.	RET.
AC-C-E3-4450-4*	1.00	10.12	3.25	5.00	5.50	2.25	44.86	14.68
AC-C-E3-4450-6*	1.50	11.62	3.75					
AC-C-E3-4450-8*	2.00	13.12	4.25					
AC-C-E3-4450-12*	3.00	16.12	5.25					
AC-C-E3-4450-16*	4.00	19.12	6.25					
AC-C-E3-4450-20*	5.00	22.12	7.25					
AC-C-E3-4450-24*	6.00	25.12	8.25					
AC-C-E3-5550-4*	1.00	10.12	3.25	5.50	5.50	2.25	56.05	18.41
AC-C-E3-5550-6*	1.50	11.62	3.75					
AC-C-E3-5550-8*	2.00	13.12	4.25					
AC-C-E3-5550-12*	3.00	16.12	5.25					
AC-C-E3-5550-16*	4.00	19.12	6.25					
AC-C-E3-5550-20*	5.00	22.12	7.25					
AC-C-E3-5550-24*	6.00	25.12	8.25					
AC-C-E3-6800-4*	1.00	10.12	3.25	6.00	6.00	2.25	68.42	22.53
AC-C-E3-6800-6*	1.50	11.62	3.75					
AC-C-E3-6800-8*	2.00	13.12	4.25					
AC-C-E3-6800-12*	3.00	16.12	5.25					
AC-C-E3-6800-16*	4.00	19.12	6.25					
AC-C-E3-6800-20*	5.00	22.12	7.25					
AC-C-E3-6800-24*	6.00	25.12	8.25					
AC-C-E3-8150-4*	1.00	10.12	3.25	6.50	6.00	2.25	81.97	27.05
AC-C-E3-8150-6*	1.50	11.62	3.75					
AC-C-E3-8150-8*	2.00	13.12	4.25					
AC-C-E3-8150-12*	3.00	16.12	5.25					
AC-C-E3-8150-16*	4.00	19.12	6.25					
AC-C-E3-8150-20*	5.00	22.12	7.25					
AC-C-E3-8150-24*	6.00	25.12	8.25					

* ADD ROD END STYLE (SEE PAGE 1 FOR OPTIONS)

ADDITIONAL STROKE LENGTHS ARE AVAILABLE IN .50" INCREMENTS

ALL PORTS 1/2-14 STANDARD PIPE TAP

Phone: (888) 654-9353

www.resistanceweldsupplies.com

PAGE 5

Technical drawing of a rod end assembly, showing side and end views with dimensions and labels.

Side View Dimensions:

- Overall length: 2.36
- Distance from left end to first feature: 1.75
- Distance from first feature to second feature: .75
- Distance from second feature to third feature: B
- Distance from third feature to fourth feature: A
- Distance from fourth feature to fifth feature: 2.13
- Distance from fifth feature to sixth feature: $\frac{2.000}{2.003}$
- Distance from sixth feature to seventh feature: .19 REF.
- Distance from seventh feature to eighth feature: 1.50 ROD STICKOUT
- Distance from eighth feature to ninth feature: .50
- Distance from ninth feature to tenth feature: .36
- Distance from tenth feature to eleventh feature: 1.85
- Distance from eleventh feature to twelfth feature: .80 R. TYP.
- Distance from twelfth feature to thirteenth feature: .36
- Distance from thirteenth feature to fourteenth feature: .98
- Distance from fourteenth feature to fifteenth feature: 2.50 DIA.

End View Dimensions:

- Overall diameter: C CYL. DIA.
- Distance from center to first feature: 1.63 ROD DIA.
- Distance from center to second feature: 1.38 FLATS CENT.

Labels and Notes:


- 1"-14 N.S. THREAD
- FORWARD STROKE
- RETURN STROKE
- ROD END *
- 1/2 DIA. X 2 1/2" LONG SPRING PIN
- 2.124 2.123 DIA.
- .80 R. TYP.

TRIPLE PISTON CYLINDERS						PISTON AREA	
MODEL NO.	STROKE	A	B	C		EXT.	RET.
AC-EA-E3-2320-4*-42	1.00	9.12	2.81	3.50		22.99 SQ. IN.	7.51 SQ. IN.
AC-EA-E3-2320-6*-42	1.50	10.62	3.31				
AC-EA-E3-2320-8*-42	2.00	12.12	3.81				
AC-EA-E3-2320-12*-42	3.00	15.12	4.81				
AC-EA-E3-2320-16*-42	4.00	18.12	5.81				
AC-EA-E3-2320-20*-42	5.00	21.12	6.81				
AC-EA-E3-2320-24*-42	6.00	24.12	7.81				
AC-EA-E3-2710-4*-42	1.00	9.12	2.81	3.75		26.97 SQ. IN.	8.84 SQ. IN.
AC-EA-E3-2710-6*-42	1.50	10.62	3.31				
AC-EA-E3-2710-8*-42	2.00	12.12	3.81				
AC-EA-E3-2710-12*-42	3.00	15.12	4.81				
AC-EA-E3-2710-16*-42	4.00	18.12	5.81				
AC-EA-E3-2710-20*-42	5.00	21.12	6.81				
AC-EA-E3-2710-24*-42	6.00	24.12	7.81				
AC-EA-E3-3140-4*-42	1.00	9.12	2.81	4.00		31.24 SQ. IN.	10.26 SQ. IN.
AC-EA-E3-3140-6*-42	1.50	10.62	3.31				
AC-EA-E3-3140-8*-42	2.00	12.12	3.81				
AC-EA-E3-3140-12*-42	3.00	15.12	4.81				
AC-EA-E3-3140-16*-42	4.00	18.12	5.81				
AC-EA-E3-3140-20*-42	5.00	21.12	6.81				
AC-EA-E3-3140-24*-42	6.00	24.12	7.81				
AC-EA-E3-3600-4*-42	1.00	9.12	2.81	4.25		35.81 SQ. IN.	11.78 SQ. IN.
AC-EA-E3-3600-6*-42	1.50	10.62	3.31				
AC-EA-E3-3600-8*-42	2.00	12.12	3.81				
AC-EA-E3-3600-12*-42	3.00	15.12	4.81				
AC-EA-E3-3600-16*-42	4.00	18.12	5.81				
AC-EA-E3-3600-20*-42	5.00	21.12	6.81				
AC-EA-E3-3600-24*-42	6.00	24.12	7.81				

ALL PORTS 3/8-18 STANDARD PIPE TAP

PAGE 6

E MOUNT CYLINDERS (4.50" - 6.00" BORE) (HEAVY DUTY)

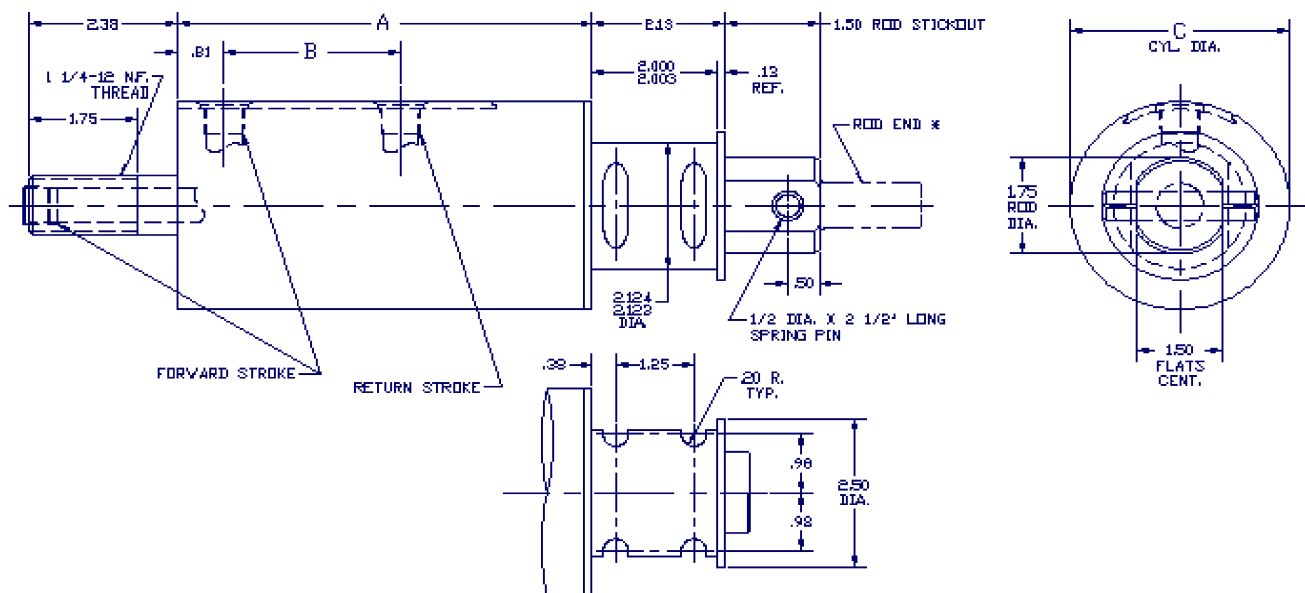

DUAL PISTON CYLINDERS					PISTON AREA	
MODEL NO.	STROKE	A	B	C	EXT.	RET.
AC-EA-G-3030-4*-42	1.00	7.38	3.25	5.00	30.58 SQ. IN.	14.68 SQ. IN.
AC-EA-G-3030-6*-42	1.50	8.38	3.75			
AC-EA-G-3030-8*-42	2.00	9.38	4.25			
AC-EA-G-3030-12*-42	3.00	11.38	5.25			
AC-EA-G-3030-16*-42	4.00	13.38	6.25			
AC-EA-G-3030-20*-42	5.00	15.38	7.25			
AC-EA-G-3030-24*-42	6.00	17.38	8.25			
AC-EA-G-3770-4*-42	1.00	7.38	3.25	5.50	38.04 SQ. IN.	18.41 SQ. IN.
AC-EA-G-3770-6*-42	1.50	8.38	3.75			
AC-EA-G-3770-8*-42	2.00	9.38	4.25			
AC-EA-G-3770-12*-42	3.00	11.38	5.25			
AC-EA-G-3770-16*-42	4.00	13.38	6.25			
AC-EA-G-3770-20*-42	5.00	15.38	7.25			
AC-EA-G-3770-24*-42	6.00	17.38	8.25			
AC-EA-G-4600-4*-42	1.00	7.38	3.25	6.00	46.29 SQ. IN.	22.53 SQ. IN.
AC-EA-G-4600-6*-42	1.50	8.38	3.75			
AC-EA-G-4600-8*-42	2.00	9.38	4.25			
AC-EA-G-4600-12*-42	3.00	11.38	5.25			
AC-EA-G-4600-16*-42	4.00	13.38	6.25			
AC-EA-G-4600-20*-42	5.00	15.38	7.25			
AC-EA-G-4600-24*-42	6.00	17.38	8.25			
AC-EA-G-5500-4*-42	1.00	7.38	3.25	6.50	55.32 SQ. IN.	27.05 SQ. IN.
AC-EA-G-5500-6*-42	1.50	8.38	3.75			
AC-EA-G-5500-8*-42	2.00	9.38	4.25			
AC-EA-G-5500-12*-42	3.00	11.38	5.25			
AC-EA-G-5500-16*-42	4.00	13.38	6.25			
AC-EA-G-5500-20*-42	5.00	15.38	7.25			
AC-EA-G-5500-24*-42	6.00	17.38	8.25			

TRIPLE PISTON CYLINDERS					PISTON AREA	
MODEL NO.	STROKE	A	B	C	EXT.	RET.
AC-EA-E3-4450-4*-42	1.00	10.12	3.25	5.00	44.86 SQ. IN.	14.68 SQ. IN.
AC-EA-E3-4450-6*-42	1.50	11.62	3.75			
AC-EA-E3-4450-8*-42	2.00	13.12	4.25			
AC-EA-E3-4450-12*-42	3.00	16.12	5.25			
AC-EA-E3-4450-16*-42	4.00	19.12	6.25			
AC-EA-E3-4450-20*-42	5.00	22.12	7.25			
AC-EA-E3-4450-24*-42	6.00	25.12	8.25			
AC-EA-E3-5550-4*-42	1.00	10.12	3.25	5.50	56.05 SQ. IN.	18.41 SQ. IN.
AC-EA-E3-5550-6*-42	1.50	11.62	3.75			
AC-EA-E3-5550-8*-42	2.00	13.12	4.25			
AC-EA-E3-5550-12*-42	3.00	16.12	5.25			
AC-EA-E3-5550-16*-42	4.00	19.12	6.25			
AC-EA-E3-5550-20*-42	5.00	22.12	7.25			
AC-EA-E3-5550-24*-42	6.00	25.12	8.25			
AC-EA-E3-6800-4*-42	1.00	10.12	3.25	6.00	68.42 SQ. IN.	22.53 SQ. IN.
AC-EA-E3-6800-6*-42	1.50	11.62	3.75			
AC-EA-E3-6800-8*-42	2.00	13.12	4.25			
AC-EA-E3-6800-12*-42	3.00	16.12	5.25			
AC-EA-E3-6800-16*-42	4.00	19.12	6.25			
AC-EA-E3-6800-20*-42	5.00	22.12	7.25			
AC-EA-E3-6800-24*-42	6.00	25.12	8.25			
AC-EA-E3-8150-4*-42	1.00	10.12	3.25	6.50	81.97 SQ. IN.	27.05 SQ. IN.
AC-EA-E3-8150-6*-42	1.50	11.62	3.75			
AC-EA-E3-8150-8*-42	2.00	13.12	4.25			
AC-EA-E3-8150-12*-42	3.00	16.12	5.25			
AC-EA-E3-8150-16*-42	4.00	19.12	6.25			
AC-EA-E3-8150-20*-42	5.00	22.12	7.25			
AC-EA-E3-8150-24*-42	6.00	25.12	8.25			

* ADD ROD END STYLE (SEE PAGE 1 FOR OPTIONS)

ADDITIONAL STROKE LENGTHS ARE AVAILABLE IN .50" INCREMENTS


ALL PORTS 1/2-14 STANDARD PIPE TAP

Phone: (888) 654-9353

www.resistanceweldsupplies.com

PAGE 7

F MOUNT CYLINDERS (3.25" - 4.00" BORE) (MEDIUM DUTY)

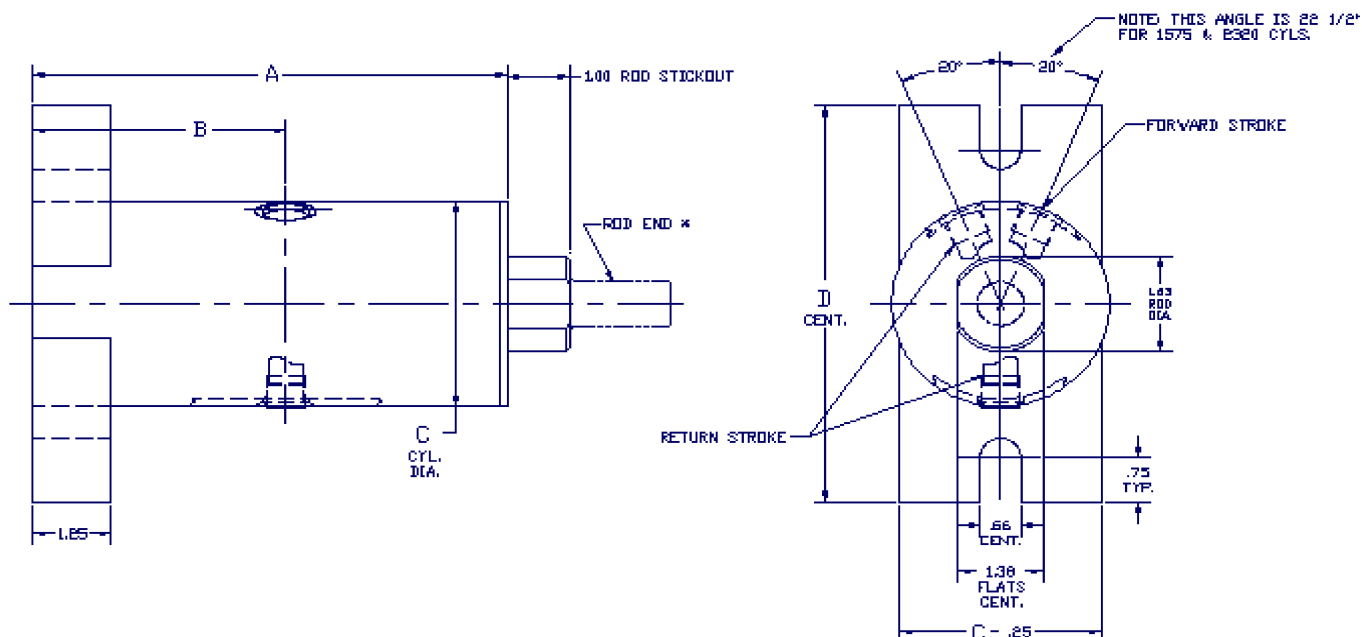

DUAL PISTON CYLINDERS						PISTON AREA	
MODEL NO.	STROKE	A	B	C	D	EXT.	RET.
AC-F-G-1575-4*	1.00	6.62	3.56	3.50	6.75	15.81 SQ. IN.	7.51 SQ. IN.
AC-F-G-1575-6*	1.50	7.62	4.06				
AC-F-G-1575-8*	2.00	8.62	4.56				
AC-F-G-1575-12*	3.00	10.62	5.56				
AC-F-G-1575-16*	4.00	12.62	6.56				
AC-F-G-1575-20*	5.00	14.62	7.56				
AC-F-G-1575-24*	6.00	16.62	8.56				
AC-F-G-1840-4*	1.00	6.62	3.56	3.75	6.75	18.46 SQ. IN.	8.84 SQ. IN.
AC-F-G-1840-6*	1.50	7.62	4.06				
AC-F-G-1840-8*	2.00	8.62	4.56				
AC-F-G-1840-12*	3.00	10.62	5.56				
AC-F-G-1840-16*	4.00	12.62	6.56				
AC-F-G-1840-20*	5.00	14.62	7.56				
AC-F-G-1840-24*	6.00	16.62	8.56				
AC-F-G-2125-4*	1.00	6.62	3.56	4.00	7.25	21.30 SQ. IN.	10.26 SQ. IN.
AC-F-G-2125-6*	1.50	7.62	4.06				
AC-F-G-2125-8*	2.00	8.62	4.56				
AC-F-G-2125-12*	3.00	10.62	5.56				
AC-F-G-2125-16*	4.00	12.62	6.56				
AC-F-G-2125-20*	5.00	14.62	7.56				
AC-F-G-2125-24*	6.00	16.62	8.56				
AC-F-G-2430-4*	1.00	6.62	3.56	4.25	7.25	24.35 SQ. IN.	11.78 SQ. IN.
AC-F-G-2430-6*	1.50	7.62	4.06				
AC-F-G-2430-8*	2.00	8.62	4.56				
AC-F-G-2430-12*	3.00	10.62	5.56				
AC-F-G-2430-16*	4.00	12.62	6.56				
AC-F-G-2430-20*	5.00	14.62	7.56				
AC-F-G-2430-24*	6.00	16.62	8.56				

TRIPLE PISTON CYLINDERS						PISTON AREA	
MODEL NO.	STROKE	A	B	C	D	EXT.	RET.
AC-F-E3-2320-4*	1.00	9.12	3.56	3.50	6.75	22.99 SQ. IN.	7.51 SQ. IN.
AC-F-E3-2320-6*	1.50	10.62	4.06				
AC-F-E3-2320-8*	2.00	12.12	4.56				
AC-F-E3-2320-12*	3.00	15.12	5.56				
AC-F-E3-2320-16*	4.00	18.12	6.56				
AC-F-E3-2320-20*	5.00	21.12	7.56				
AC-F-E3-2320-24*	6.00	24.12	8.56				
AC-F-E3-2710-4*	1.00	9.12	3.56	3.75	6.75	26.97 SQ. IN.	8.84 SQ. IN.
AC-F-E3-2710-6*	1.50	10.62	4.06				
AC-F-E3-2710-8*	2.00	12.12	4.56				
AC-F-E3-2710-12*	3.00	15.12	5.56				
AC-F-E3-2710-16*	4.00	18.12	6.56				
AC-F-E3-2710-20*	5.00	21.12	7.56				
AC-F-E3-2710-24*	6.00	24.12	8.56				
AC-F-E3-3140-4*	1.00	9.12	3.56	4.00	7.25	31.24 SQ. IN.	10.26 SQ. IN.
AC-F-E3-3140-6*	1.50	10.62	4.06				
AC-F-E3-3140-8*	2.00	12.12	4.56				
AC-F-E3-3140-12*	3.00	15.12	5.56				
AC-F-E3-3140-16*	4.00	18.12	6.56				
AC-F-E3-3140-20*	5.00	21.12	7.56				
AC-F-E3-3140-24*	6.00	24.12	8.56				
AC-F-E3-3600-4*	1.00	9.12	3.56	4.25	7.25	35.81 SQ. IN.	11.78 SQ. IN.
AC-F-E3-3600-6*	1.50	10.62	4.06				
AC-F-E3-3600-8*	2.00	12.12	4.56				
AC-F-E3-3600-12*	3.00	15.12	5.56				
AC-F-E3-3600-16*	4.00	18.12	6.56				
AC-F-E3-3600-20*	5.00	21.12	7.56				
AC-F-E3-3600-24*	6.00	24.12	8.56				

* ADD ROD END STYLE (SEE PAGE 1 FOR OPTIONS)

ADDITIONAL STROKE LENGTHS ARE AVAILABLE IN .50" INCREMENTS


ALL PORTS 3/8-18 STANDARD PIPE TAP

Phone: (888) 654-9353

www.resistanceweldsupplies.com

PAGE 8

F MOUNT CYLINDERS (4.50" - 6.00" BORE) (HEAVY DUTY)

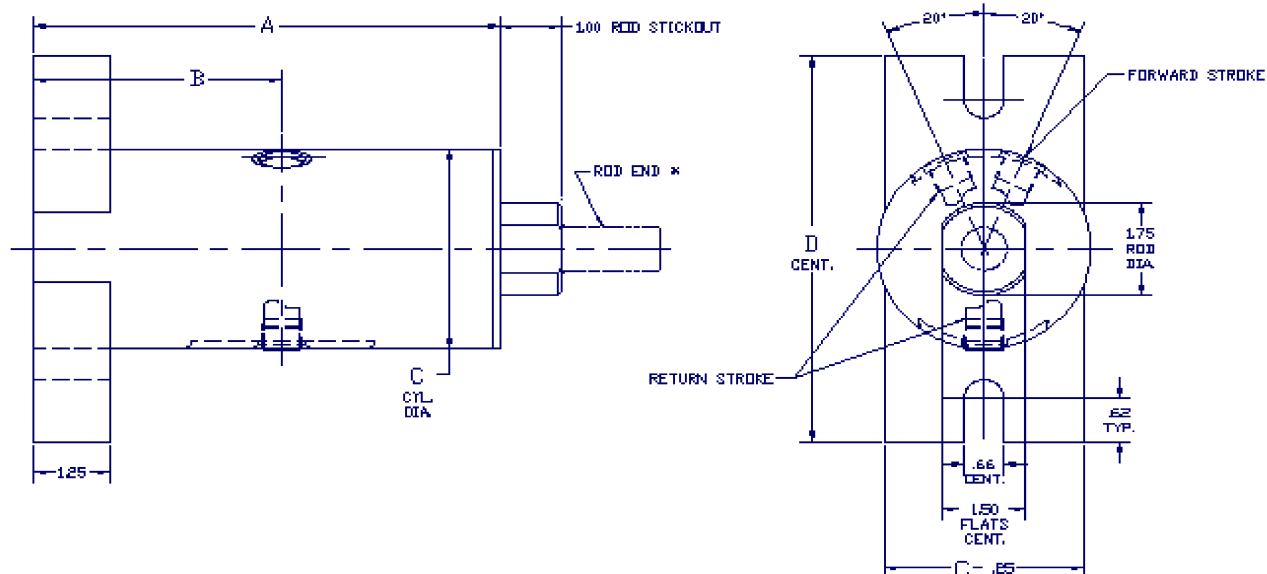

DUAL PISTON CYLINDERS						PISTON AREA	
MODEL NO.	STROKE	A	B	C	D	EXT.	RET.
AC-F-G-3030-4*	1.00	7.38	4.06	5.00	8.00	30.58	14.68
AC-F-G-3030-6*	1.50	8.38	4.56				
AC-F-G-3030-8*	2.00	9.38	5.06				
AC-F-G-3030-12*	3.00	11.38	6.06				
AC-F-G-3030-16*	4.00	13.38	7.06				
AC-F-G-3030-20*	5.00	15.38	8.06				
AC-F-G-3030-24*	6.00	17.38	9.06				
AC-F-G-3770-4*	1.00	7.38	4.06	5.50	8.00	38.04	18.41
AC-F-G-3770-6*	1.50	8.38	4.56				
AC-F-G-3770-8*	2.00	9.38	5.06				
AC-F-G-3770-12*	3.00	11.38	6.06				
AC-F-G-3770-16*	4.00	13.38	7.06				
AC-F-G-3770-20*	5.00	15.38	8.06				
AC-F-G-3770-24*	6.00	17.38	9.06				
AC-F-G-4600-4*	1.00	7.38	4.06	6.00	9.00	46.29	22.53
AC-F-G-4600-6*	1.50	8.38	4.56				
AC-F-G-4600-8*	2.00	9.38	5.06				
AC-F-G-4600-12*	3.00	11.38	6.06				
AC-F-G-4600-16*	4.00	13.38	7.06				
AC-F-G-4600-20*	5.00	15.38	8.06				
AC-F-G-4600-24*	6.00	17.38	9.06				
AC-F-G-5500-4*	1.00	7.38	4.06	6.50	9.00	55.32	27.05
AC-F-G-5500-6*	1.50	8.38	4.56				
AC-F-G-5500-8*	2.00	9.38	5.06				
AC-F-G-5500-12*	3.00	11.38	6.06				
AC-F-G-5500-16*	4.00	13.38	7.06				
AC-F-G-5500-20*	5.00	15.38	8.06				
AC-F-G-5500-24*	6.00	17.38	9.06				

TRIPLE PISTON CYLINDERS						PISTON AREA	
MODEL NO.	STROKE	A	B	C	D	EXT.	RET.
AC-F-E3-4450-4*	1.00	10.12	4.06	5.00	8.00	44.86	14.68
AC-F-E3-4450-6*	1.50	11.62	4.56				
AC-F-E3-4450-8*	2.00	13.12	5.06				
AC-F-E3-4450-12*	3.00	16.12	6.06				
AC-F-E3-4450-16*	4.00	19.12	7.06				
AC-F-E3-4450-20*	5.00	22.12	8.06				
AC-F-E3-4450-24*	6.00	25.12	9.06				
AC-F-E3-5550-4*	1.00	10.12	4.06	5.50	8.00	56.05	18.41
AC-F-E3-5550-6*	1.50	11.62	4.56				
AC-F-E3-5550-8*	2.00	13.12	5.06				
AC-F-E3-5550-12*	3.00	16.12	6.06				
AC-F-E3-5550-16*	4.00	19.12	7.06				
AC-F-E3-5550-20*	5.00	22.12	8.06				
AC-F-E3-5550-24*	6.00	25.12	9.06				
AC-F-E3-6800-4*	1.00	10.12	4.06	6.00	9.00	68.42	22.53
AC-F-E3-6800-6*	1.50	11.62	4.56				
AC-F-E3-6800-8*	2.00	13.12	5.06				
AC-F-E3-6800-12*	3.00	16.12	6.06				
AC-F-E3-6800-16*	4.00	19.12	7.06				
AC-F-E3-6800-20*	5.00	22.12	8.06				
AC-F-E3-6800-24*	6.00	25.12	9.06				
AC-F-E3-8150-4*	1.00	10.12	4.06	6.50	9.00	81.97	27.05
AC-F-E3-8150-6*	1.50	11.62	4.56				
AC-F-E3-8150-8*	2.00	13.12	5.06				
AC-F-E3-8150-12*	3.00	16.12	6.06				
AC-F-E3-8150-16*	4.00	19.12	7.06				
AC-F-E3-8150-20*	5.00	22.12	8.06				
AC-F-E3-8150-24*	6.00	25.12	9.06				

* ADD ROD END STYLE (SEE PAGE 1 FOR OPTIONS)

ADDITIONAL STROKE LENGTHS ARE AVAILABLE IN .50" INCREMENTS


ALL PORTS 1/2-14 STANDARD PIPE TAP

Phone: (888) 654-9353

www.resistanceweldsupplies.com

PAGE 9

J 3/4 MOUNT CYLINDERS (3.25" - 4.00" BORE) (MEDIUM DUTY)

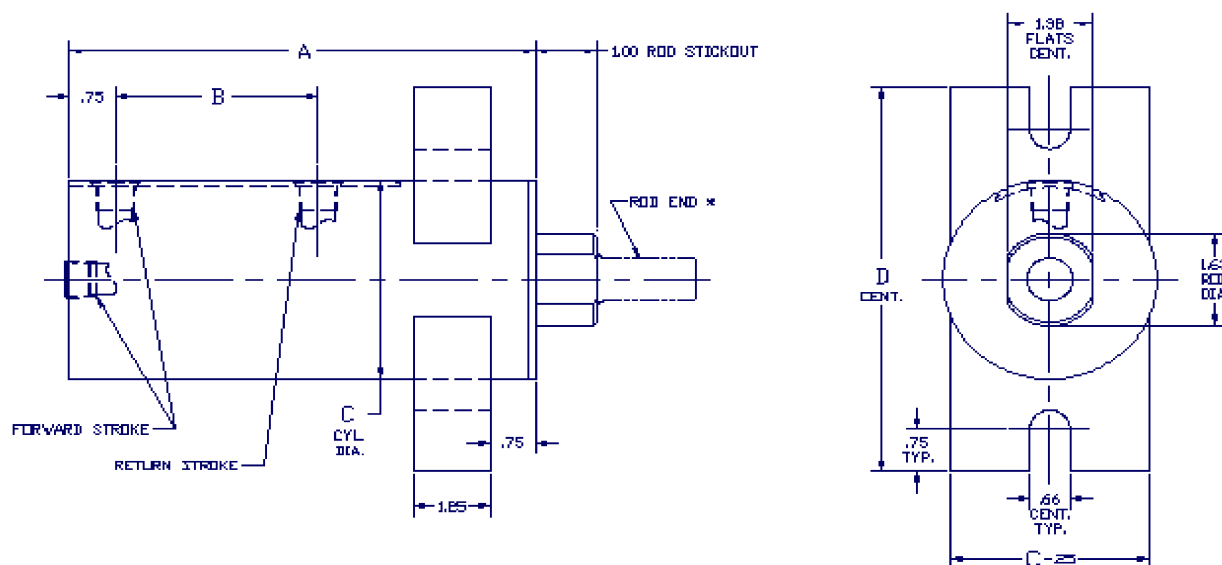

DUAL PISTON CYLINDERS						PISTON AREA	
MODEL NO.	STROKE	A	B	C	D	EXT.	RET.
AC-J3/4-G-1575-4*	1.00	6.62	2.81	3.50	6.75	15.81	7.51
AC-J3/4-G-1575-6*	1.50	7.62	3.31				
AC-J3/4-G-1575-8*	2.00	8.62	3.81				
AC-J3/4-G-1575-12*	3.00	10.62	4.81				
AC-J3/4-G-1575-16*	4.00	12.62	5.81				
AC-J3/4-G-1575-20*	5.00	14.62	6.81				
AC-J3/4-G-1575-24*	6.00	16.62	7.81				
AC-J3/4-G-1840-4*	1.00	6.62	2.81	3.75	6.75	18.46	8.84
AC-J3/4-G-1840-6*	1.50	7.62	3.31				
AC-J3/4-G-1840-8*	2.00	8.62	3.81				
AC-J3/4-G-1840-12*	3.00	10.62	4.81				
AC-J3/4-G-1840-16*	4.00	12.62	5.81				
AC-J3/4-G-1840-20*	5.00	14.62	6.81				
AC-J3/4-G-1840-24*	6.00	16.62	7.81				
AC-J3/4-G-2125-4*	1.00	6.62	2.81	4.00	7.25	21.30	10.26
AC-J3/4-G-2125-6*	1.50	7.62	3.31				
AC-J3/4-G-2125-8*	2.00	8.62	3.81				
AC-J3/4-G-2125-12*	3.00	10.62	4.81				
AC-J3/4-G-2125-16*	4.00	12.62	5.81				
AC-J3/4-G-2125-20*	5.00	14.62	6.81				
AC-J3/4-G-2125-24*	6.00	16.62	7.81				
AC-J3/4-G-2430-4*	1.00	6.62	2.81	4.25	7.25	24.35	11.78
AC-J3/4-G-2430-6*	1.50	7.62	3.31				
AC-J3/4-G-2430-8*	2.00	8.62	3.81				
AC-J3/4-G-2430-12*	3.00	10.62	4.81				
AC-J3/4-G-2430-16*	4.00	12.62	5.81				
AC-J3/4-G-2430-20*	5.00	14.62	6.81				
AC-J3/4-G-2430-24*	6.00	16.62	7.81				

TRIPLE PISTON CYLINDERS						PISTON AREA	
MODEL NO.	STROKE	A	B	C	D	EXT.	RET.
AC-J3/4-E3-2320-4*	1.00	9.12	2.81	3.50	6.75	22.99	7.51
AC-J3/4-E3-2320-6*	1.50	10.62	3.31				
AC-J3/4-E3-2320-8*	2.00	12.12	3.81				
AC-J3/4-E3-2320-12*	3.00	15.12	4.81				
AC-J3/4-E3-2320-16*	4.00	18.12	5.81				
AC-J3/4-E3-2320-20*	5.00	21.12	6.81				
AC-J3/4-E3-2320-24*	6.00	24.12	7.81				
AC-J3/4-E3-2710-4*	1.00	9.12	2.81	3.75	6.75	26.97	8.84
AC-J3/4-E3-2710-6*	1.50	10.62	3.31				
AC-J3/4-E3-2710-8*	2.00	12.12	3.81				
AC-J3/4-E3-2710-12*	3.00	15.12	4.81				
AC-J3/4-E3-2710-16*	4.00	18.12	5.81				
AC-J3/4-E3-2710-20*	5.00	21.12	6.81				
AC-J3/4-E3-2710-24*	6.00	24.12	7.81				
AC-J3/4-E3-3140-4*	1.00	9.12	2.81	4.00	7.25	31.24	10.26
AC-J3/4-E3-3140-6*	1.50	10.62	3.31				
AC-J3/4-E3-3140-8*	2.00	12.12	3.81				
AC-J3/4-E3-3140-12*	3.00	15.12	4.81				
AC-J3/4-E3-3140-16*	4.00	18.12	5.81				
AC-J3/4-E3-3140-20*	5.00	21.12	6.81				
AC-J3/4-E3-3140-24*	6.00	24.12	7.81				
AC-J3/4-E3-3600-4*	1.00	9.12	2.81	4.25	7.25	35.81	11.78
AC-J3/4-E3-3600-6*	1.50	10.62	3.31				
AC-J3/4-E3-3600-8*	2.00	12.12	3.81				
AC-J3/4-E3-3600-12*	3.00	15.12	4.81				
AC-J3/4-E3-3600-16*	4.00	18.12	5.81				
AC-J3/4-E3-3600-20*	5.00	21.12	6.81				
AC-J3/4-E3-3600-24*	6.00	24.12	7.81				

* ADD ROD END STYLE (SEE PAGE 1 FOR OPTIONS)

ADDITIONAL STROKE LENGTHS ARE AVAILABLE IN .50" INCREMENTS


ALL PORTS 3/8-18 STANDARD PIPE TAP

Phone: (888) 654-9353

www.resistanceweldsupplies.com

PAGE 10

J 3/4 MOUNT CYLINDERS (4.50" - 6.00" BORE) (HEAVY DUTY)

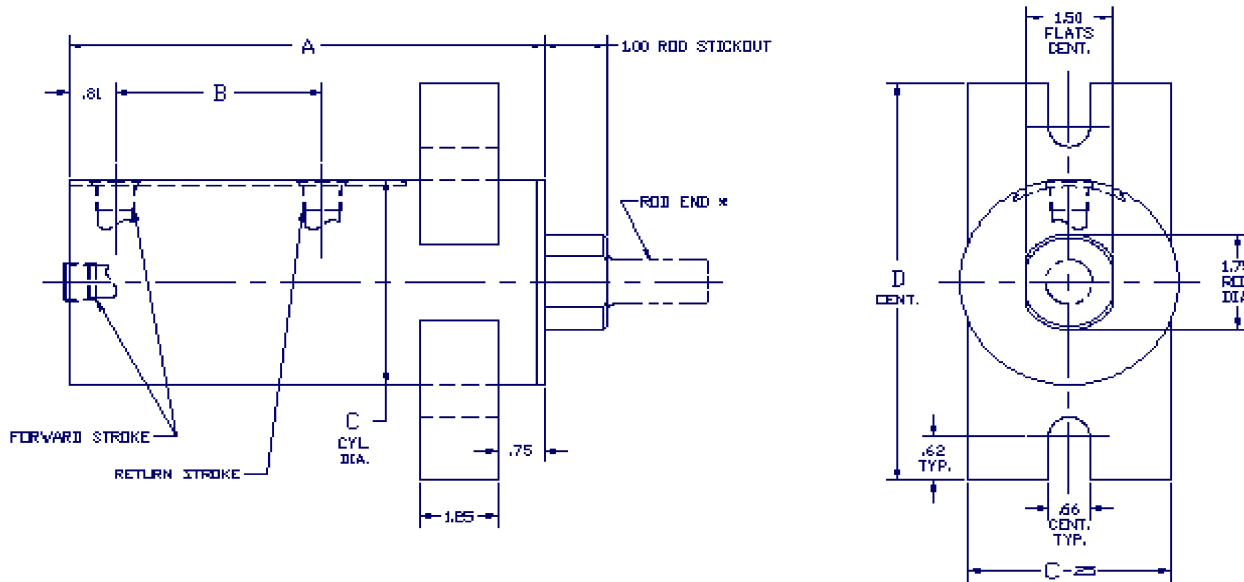

DUAL PISTON CYLINDERS						PISTON AREA	
MODEL NO.	STROKE	A	B	C	D	EXT.	RET.
AC-J3/4-G-3030-4*	1.00	7.38	3.25	5.00	8.00	30.58	14.68
AC-J3/4-G-3030-6*	1.50	8.38	3.75				
AC-J3/4-G-3030-8*	2.00	9.38	4.25				
AC-J3/4-G-3030-12*	3.00	11.38	5.25				
AC-J3/4-G-3030-16*	4.00	13.38	6.25				
AC-J3/4-G-3030-20*	5.00	15.38	7.25				
AC-J3/4-G-3030-24*	6.00	17.38	8.25				
AC-J3/4-G-3770-4*	1.00	7.38	3.25	5.50	8.00	38.04	18.41
AC-J3/4-G-3770-6*	1.50	8.38	3.75				
AC-J3/4-G-3770-8*	2.00	9.38	4.25				
AC-J3/4-G-3770-12*	3.00	11.38	5.25				
AC-J3/4-G-3770-16*	4.00	13.38	6.25				
AC-J3/4-G-3770-20*	5.00	15.38	7.25				
AC-J3/4-G-3770-24*	6.00	17.38	8.25				
AC-J3/4-G-4600-4*	1.00	7.38	3.25	6.00	9.00	46.29	22.53
AC-J3/4-G-4600-6*	1.50	8.38	3.75				
AC-J3/4-G-4600-8*	2.00	9.38	4.25				
AC-J3/4-G-4600-12*	3.00	11.38	5.25				
AC-J3/4-G-4600-16*	4.00	13.38	6.25				
AC-J3/4-G-4600-20*	5.00	15.38	7.25				
AC-J3/4-G-4600-24*	6.00	17.38	8.25				
AC-J3/4-G-5500-4*	1.00	7.38	3.25	6.50	9.00	55.32	27.05
AC-J3/4-G-5500-6*	1.50	8.38	3.75				
AC-J3/4-G-5500-8*	2.00	9.38	4.25				
AC-J3/4-G-5500-12*	3.00	11.38	5.25				
AC-J3/4-G-5500-16*	4.00	13.38	6.25				
AC-J3/4-G-5500-20*	5.00	15.38	7.25				
AC-J3/4-G-5500-24*	6.00	17.38	8.25				

TRIPLE PISTON CYLINDERS						PISTON AREA	
MODEL NO.	STROKE	A	B	C	D	EXT.	RET.
AC-J3/4-E3-4450-4*	1.00	10.12	3.25	5.00	8.00	44.86	14.68
AC-J3/4-E3-4450-6*	1.50	11.62	3.75				
AC-J3/4-E3-4450-8*	2.00	13.12	4.25				
AC-J3/4-E3-4450-12*	3.00	16.12	5.25				
AC-J3/4-E3-4450-16*	4.00	19.12	6.25				
AC-J3/4-E3-4450-20*	5.00	22.12	7.25				
AC-J3/4-E3-4450-24*	6.00	25.12	8.25				
AC-J3/4-E3-5550-4*	1.00	10.12	3.25	5.50	8.00	56.05	18.41
AC-J3/4-E3-5550-6*	1.50	11.62	3.75				
AC-J3/4-E3-5550-8*	2.00	13.12	4.25				
AC-J3/4-E3-5550-12*	3.00	16.12	5.25				
AC-J3/4-E3-5550-16*	4.00	19.12	6.25				
AC-J3/4-E3-5550-20*	5.00	22.12	7.25				
AC-J3/4-E3-5550-24*	6.00	25.12	8.25				
AC-J3/4-E3-6800-4*	1.00	10.12	3.25	6.00	9.00	68.42	22.53
AC-J3/4-E3-6800-6*	1.50	11.62	3.75				
AC-J3/4-E3-6800-8*	2.00	13.12	4.25				
AC-J3/4-E3-6800-12*	3.00	16.12	5.25				
AC-J3/4-E3-6800-16*	4.00	19.12	6.25				
AC-J3/4-E3-6800-20*	5.00	22.12	7.25				
AC-J3/4-E3-6800-24*	6.00	25.12	8.25				
AC-J3/4-E3-8150-4*	1.00	10.12	3.25	6.50	9.00	81.97	27.05
AC-J3/4-E3-8150-6*	1.50	11.62	3.75				
AC-J3/4-E3-8150-8*	2.00	13.12	4.25				
AC-J3/4-E3-8150-12*	3.00	16.12	5.25				
AC-J3/4-E3-8150-16*	4.00	19.12	6.25				
AC-J3/4-E3-8150-20*	5.00	22.12	7.25				
AC-J3/4-E3-8150-24*	6.00	25.12	8.25				

* ADD ROD END STYLE (SEE PAGE 1 FOR OPTIONS)

ADDITIONAL STROKE LENGTHS ARE AVAILABLE IN .50" INCREMENTS

ALL PORTS 1/2-14 STANDARD PIPE TAP

Phone: (888) 654-9353

www.resistanceweldsupplies.com

PNEUMATIC CYLINDER - PRESSURE CHARTS

Dual Piston Cylinders										
Group	Model	Piston Area (Sq. In.)		Cylinder Extend Force (Lbs.) @95% Eff. Line Pressure (P.S.I.)						
		Extend	Return	40	50	60	70	80	90	100
Light Duty	436	4.36	1.96	166	207	249	290	331	373	414
	584	5.84	2.70	222	277	333	388	444	499	555
	750	7.50	3.53	285	356	428	499	570	641	713
	937	9.37	4.47	356	445	534	623	712	801	890
	1143	11.43	5.50	434	543	652	760	869	977	1086
	1360	13.60	6.63	517	646	775	904	1034	1163	1292
Medium Duty	1575	15.81	7.51	601	751	901	1051	1202	1352	1502
	1840	18.46	8.84	701	877	1052	1228	1403	1578	1754
	2125	21.30	10.26	809	1012	1214	1416	1619	1821	2024
	2430	24.35	11.78	925	1157	1387	1619	1851	2082	2313
Heavy Duty	3030	30.58	14.68	1162	1453	1743	2034	2891	2615	2905
	3770	38.04	18.41	1446	1807	2168	2530	2891	3252	3614
	4600	46.29	22.53	1759	2199	2639	3078	3518	3958	4398
	5500	55.32	27.05	2102	2628	3153	3679	4204	4730	5255
Triple Piston Cylinders										
Group	Model	Piston Area (Sq. In.)		Cylinder Extend Force (Lbs.) @95% Eff. Line Pressure (P.S.I.)						
		Extend	Return	40	50	60	70	80	90	100
Light Duty	620	6.20	1.96	236	295	353	412	471	718	589
	840	8.40	2.70	319	399	479	559	638	718	798
	1087	10.87	3.53	413	516	620	723	826	929	1033
	1370	13.70	4.47	521	651	781	911	1041	1171	1302
	1680	16.80	5.50	638	798	958	1117	1277	1436	1596
	2010	20.10	6.63	764	955	1146	1337	1528	1719	1910
Medium Duty	2320	22.99	7.51	874	1092	1310	1529	1747	1966	2184
	2710	26.97	8.84	1025	1281	1537	1794	2050	2306	2562
	3140	31.24	10.26	1187	1484	1781	2077	2374	2671	2968
	3600	35.81	11.78	1361	1701	2041	2381	2722	3062	3402
Heavy Duty	4450	44.86	14.68	1705	2131	2557	2983	3409	3836	4262
	5550	56.05	18.41	2130	2662	3195	3727	4260	4792	5325
	6800	68.42	22.53	2600	3250	3900	4550	5200	5850	6500
	8150	81.97	27.05	3115	3894	4672	5451	6230	7008	7787