


E MOUNT CYLINDERS (3.25" - 4.00" BORE) (MEDIUM DUTY)

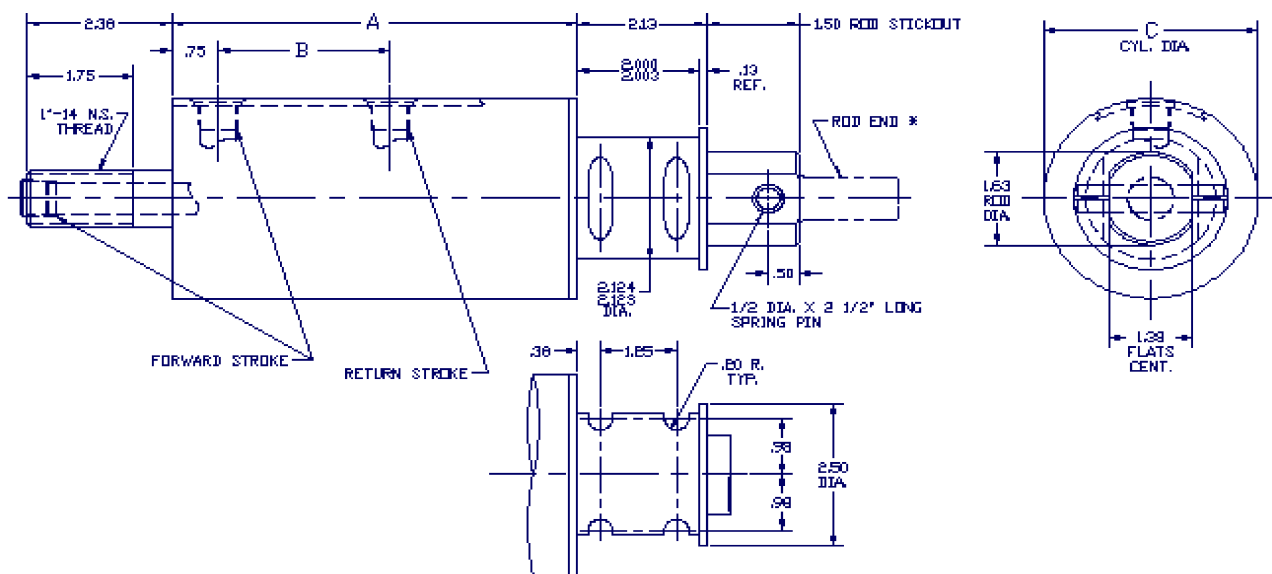

DUAL PISTON CYLINDERS					PISTON AREA	
MODEL NO.	STROKE	A	B	C	EXT.	RET.
AC-EA-G-1575-4*-42	1.00	6.62	2.81	3.50	15.81 SQ. IN.	7.51 SQ. IN.
AC-EA-G-1575-6*-42	1.50	7.62	3.31			
AC-EA-G-1575-8*-42	2.00	8.62	3.81			
AC-EA-G-1575-12*-42	3.00	10.62	4.81			
AC-EA-G-1575-16*-42	4.00	12.62	5.81			
AC-EA-G-1575-20*-42	5.00	14.62	6.81			
AC-EA-G-1575-24*-42	6.00	16.62	7.81			
AC-EA-G-1840-4*-42	1.00	6.62	2.81	3.75	18.46 SQ. IN.	8.84 SQ. IN.
AC-EA-G-1840-6*-42	1.50	7.62	3.31			
AC-EA-G-1840-8*-42	2.00	8.62	3.81			
AC-EA-G-1840-12*-42	3.00	10.62	4.81			
AC-EA-G-1840-16*-42	4.00	12.62	5.81			
AC-EA-G-1840-20*-42	5.00	14.62	6.81			
AC-EA-G-1840-24*-42	6.00	16.62	7.81			
AC-EA-G-2125-4*-42	1.00	6.62	2.81	4.00	21.30 SQ. IN.	10.26 SQ. IN.
AC-EA-G-2125-6*-42	1.50	7.62	3.31			
AC-EA-G-2125-8*-42	2.00	8.62	3.81			
AC-EA-G-2125-12*-42	3.00	10.62	4.81			
AC-EA-G-2125-16*-42	4.00	12.62	5.81			
AC-EA-G-2125-20*-42	5.00	14.62	6.81			
AC-EA-G-2125-24*-42	6.00	16.62	7.81			
AC-EA-G-2430-4*-42	1.00	6.62	2.81	4.25	24.35 SQ. IN.	11.78 SQ. IN.
AC-EA-G-2430-6*-42	1.50	7.62	3.31			
AC-EA-G-2430-8*-42	2.00	8.62	3.81			
AC-EA-G-2430-12*-42	3.00	10.62	4.81			
AC-EA-G-2430-16*-42	4.00	12.62	5.81			
AC-EA-G-2430-20*-42	5.00	14.62	6.81			
AC-EA-G-2430-24*-42	6.00	16.62	7.81			

TRIPLE PISTON CYLINDERS					PISTON AREA	
MODEL NO.	STROKE	A	B	C	EXT.	RET.
AC-EA-E3-2320-4*-42	1.00	9.12	2.81	3.50	22.99 SQ. IN.	7.51 SQ. IN.
AC-EA-E3-2320-6*-42	1.50	10.62	3.31			
AC-EA-E3-2320-8*-42	2.00	12.12	3.81			
AC-EA-E3-2320-12*-42	3.00	15.12	4.81			
AC-EA-E3-2320-16*-42	4.00	18.12	5.81			
AC-EA-E3-2320-20*-42	5.00	21.12	6.81			
AC-EA-E3-2320-24*-42	6.00	24.12	7.81			
AC-EA-E3-2710-4*-42	1.00	9.12	2.81	3.75	26.97 SQ. IN.	8.84 SQ. IN.
AC-EA-E3-2710-6*-42	1.50	10.62	3.31			
AC-EA-E3-2710-8*-42	2.00	12.12	3.81			
AC-EA-E3-2710-12*-42	3.00	15.12	4.81			
AC-EA-E3-2710-16*-42	4.00	18.12	5.81			
AC-EA-E3-2710-20*-42	5.00	21.12	6.81			
AC-EA-E3-2710-24*-42	6.00	24.12	7.81			
AC-EA-E3-3140-4*-42	1.00	9.12	2.81	4.00	31.24 SQ. IN.	10.26 SQ. IN.
AC-EA-E3-3140-6*-42	1.50	10.62	3.31			
AC-EA-E3-3140-8*-42	2.00	12.12	3.81			
AC-EA-E3-3140-12*-42	3.00	15.12	4.81			
AC-EA-E3-3140-16*-42	4.00	18.12	5.81			
AC-EA-E3-3140-20*-42	5.00	21.12	6.81			
AC-EA-E3-3140-24*-42	6.00	24.12	7.81			
AC-EA-E3-3600-4*-42	1.00	9.12	2.81	4.25	35.81 SQ. IN.	11.78 SQ. IN.
AC-EA-E3-3600-6*-42	1.50	10.62	3.31			
AC-EA-E3-3600-8*-42	2.00	12.12	3.81			
AC-EA-E3-3600-12*-42	3.00	15.12	4.81			
AC-EA-E3-3600-16*-42	4.00	18.12	5.81			
AC-EA-E3-3600-20*-42	5.00	21.12	6.81			
AC-EA-E3-3600-24*-42	6.00	24.12	7.81			

* ADD ROD END STYLE (SEE PAGE 1 FOR OPTIONS)

ADDITIONAL STROKE LENGTHS ARE AVAILABLE IN .50" INCREMENTS

ALL PORTS 3/8-18 STANDARD PIPE TAP

Phone: (888) 654-9353

www.resistanceweldsupplies.com

PAGE 6