
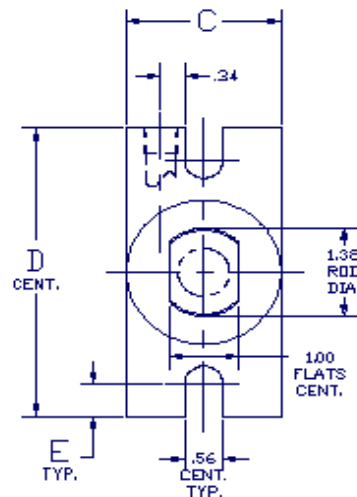


## F MOUNT CYLINDERS (1.75" - 3.00" BORE)

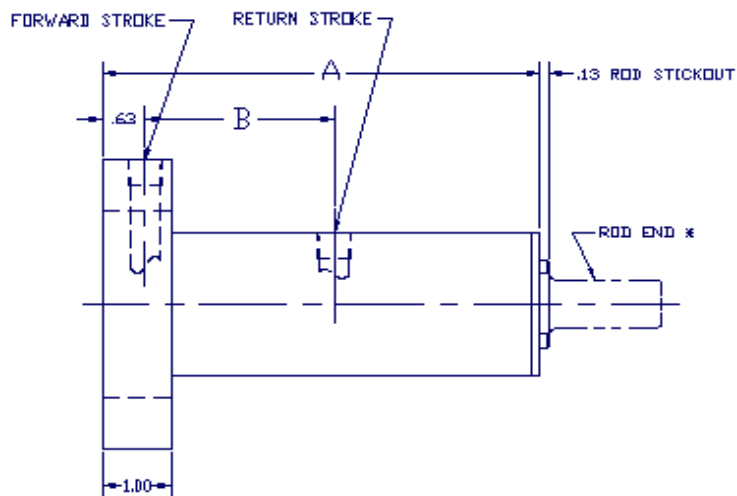

| DUAL PISTON CYLINDERS |        |       |      |      |       | PISTON AREA |         |
|-----------------------|--------|-------|------|------|-------|-------------|---------|
| MODEL NO.             | STROKE | A     | B    | C    | D & E | EXT.        | RET.    |
| AC-F-G-436-4*         | 1.00   | 5.38  | 2.25 | 2.00 | D     |             |         |
| AC-F-G-436-6*         | 1.50   | 6.38  | 2.75 |      | 4.50  | 4.36        | 1.96    |
| AC-F-G-436-8*         | 2.00   | 7.38  | 3.25 |      |       | SQ. IN.     | SQ. IN. |
| AC-F-G-436-12*        | 3.00   | 9.38  | 4.25 |      | E     |             |         |
| AC-F-G-436-16*        | 4.00   | 11.38 | 5.25 |      | .50   |             |         |
| AC-F-G-584-4*         | 1.00   | 5.38  | 2.25 | 2.25 | D     |             |         |
| AC-F-G-584-6*         | 1.50   | 6.38  | 2.75 |      | 4.50  | 5.84        | 2.70    |
| AC-F-G-584-8*         | 2.00   | 7.38  | 3.25 |      |       | SQ. IN.     | SQ. IN. |
| AC-F-G-584-12*        | 3.00   | 9.38  | 4.25 |      | E     |             |         |
| AC-F-G-584-16*        | 4.00   | 11.38 | 5.25 |      | .50   |             |         |
| AC-F-G-750-4*         | 1.00   | 5.38  | 2.25 | 2.50 | D     |             |         |
| AC-F-G-750-6*         | 1.50   | 6.38  | 2.75 |      | 5.50  | 7.50        | 3.53    |
| AC-F-G-750-8*         | 2.00   | 7.38  | 3.25 |      |       | SQ. IN.     | SQ. IN. |
| AC-F-G-750-12*        | 3.00   | 9.38  | 4.25 |      | E     |             |         |
| AC-F-G-750-16*        | 4.00   | 11.38 | 5.25 |      | .75   |             |         |
| AC-F-G-937-4*         | 1.00   | 5.38  | 2.25 | 2.75 | D     |             |         |
| AC-F-G-937-6*         | 1.50   | 6.38  | 2.75 |      | 5.50  | 9.37        | 4.46    |
| AC-F-G-937-8*         | 2.00   | 7.38  | 3.25 |      |       | SQ. IN.     | SQ. IN. |
| AC-F-G-937-12*        | 3.00   | 9.38  | 4.25 |      | E     |             |         |
| AC-F-G-937-16*        | 4.00   | 11.38 | 5.25 |      | .75   |             |         |
| AC-F-G-1143-4*        | 1.00   | 5.38  | 2.25 | 3.00 | D     |             |         |
| AC-F-G-1143-6*        | 1.50   | 6.38  | 2.75 |      | 5.75  | 11.43       | 5.50    |
| AC-F-G-1143-8*        | 2.00   | 7.38  | 3.25 |      |       | SQ. IN.     | SQ. IN. |
| AC-F-G-1143-12*       | 3.00   | 9.38  | 4.25 |      | E     |             |         |
| AC-F-G-1143-16*       | 4.00   | 11.38 | 5.25 |      | .69   |             |         |
| AC-F-G-1360-4*        | 1.00   | 5.38  | 2.25 | 3.25 | D     |             |         |
| AC-F-G-1360-6*        | 1.50   | 6.38  | 2.75 |      | 5.75  | 13.60       | 6.63    |
| AC-F-G-1360-8*        | 2.00   | 7.38  | 3.25 |      |       | SQ. IN.     | SQ. IN. |
| AC-F-G-1360-12*       | 3.00   | 9.38  | 4.25 |      | E     |             |         |
| AC-F-G-1360-16*       | 4.00   | 11.38 | 5.25 |      | .69   |             |         |

| TRIPLE PISTON CYLINDERS |        |       |      |      |       | PISTON AREA |         |
|-------------------------|--------|-------|------|------|-------|-------------|---------|
| MODEL NO.               | STROKE | A     | B    | C    | D & E | EXT.        | RET.    |
| AC-F-G3-620-4*          | 1.00   | 7.38  | 2.25 | 2.00 | D     |             |         |
| AC-F-G3-620-6*          | 1.50   | 8.88  | 2.75 |      | 4.50  | 6.20        | 1.96    |
| AC-F-G3-620-8*          | 2.00   | 10.38 | 3.25 |      |       | SQ. IN.     | SQ. IN. |
| AC-F-G3-620-12*         | 3.00   | 13.38 | 4.25 |      | E     |             |         |
| AC-F-G3-620-16*         | 4.00   | 16.38 | 5.25 |      | .50   |             |         |
| AC-F-G3-840-4*          | 1.00   | 7.38  | 2.25 | 2.25 | D     |             |         |
| AC-F-G3-840-6*          | 1.50   | 8.88  | 2.75 |      | 4.50  | 8.40        | 2.70    |
| AC-F-G3-840-8*          | 2.00   | 10.38 | 3.25 |      |       | SQ. IN.     | SQ. IN. |
| AC-F-G3-840-12*         | 3.00   | 13.38 | 4.25 |      | E     |             |         |
| AC-F-G3-840-16*         | 4.00   | 16.38 | 5.25 |      | .50   |             |         |
| AC-F-G3-1087-4*         | 1.00   | 7.38  | 2.25 | 2.50 | D     |             |         |
| AC-F-G3-1087-6*         | 1.50   | 8.88  | 2.75 |      | 5.50  | 10.87       | 3.53    |
| AC-F-G3-1087-8*         | 2.00   | 10.38 | 3.25 |      |       | SQ. IN.     | SQ. IN. |
| AC-F-G3-1087-12*        | 3.00   | 13.38 | 4.25 |      | E     |             |         |
| AC-F-G3-1087-16*        | 4.00   | 16.38 | 5.25 |      | .75   |             |         |
| AC-F-G3-1370-4*         | 1.00   | 7.38  | 2.25 | 2.75 | D     |             |         |
| AC-F-G3-1370-6*         | 1.50   | 8.88  | 2.75 |      | 5.50  | 13.70       | 4.46    |
| AC-F-G3-1370-8*         | 2.00   | 10.38 | 3.25 |      |       | SQ. IN.     | SQ. IN. |
| AC-F-G3-1370-12*        | 3.00   | 13.38 | 4.25 |      | E     |             |         |
| AC-F-G3-1370-16*        | 4.00   | 16.38 | 5.25 |      | .75   |             |         |
| AC-F-G3-1680-4*         | 1.00   | 7.38  | 2.25 | 3.00 | D     |             |         |
| AC-F-G3-1680-6*         | 1.50   | 8.88  | 2.75 |      | 5.75  | 16.80       | 5.50    |
| AC-F-G3-1680-8*         | 2.00   | 10.38 | 3.25 |      |       | SQ. IN.     | SQ. IN. |
| AC-F-G3-1680-12*        | 3.00   | 13.38 | 4.25 |      | E     |             |         |
| AC-F-G3-1680-16*        | 4.00   | 16.38 | 5.25 |      | .69   |             |         |
| AC-F-G3-2010-4*         | 1.00   | 7.38  | 2.25 | 3.25 | D     |             |         |
| AC-F-G3-2010-6*         | 1.50   | 8.88  | 2.75 |      | 5.75  | 20.10       | 6.63    |
| AC-F-G3-2010-8*         | 2.00   | 10.38 | 3.25 |      |       | SQ. IN.     | SQ. IN. |
| AC-F-G3-2010-12*        | 3.00   | 13.38 | 4.25 |      | E     |             |         |
| AC-F-G3-2010-16*        | 4.00   | 16.38 | 5.25 |      | .69   |             |         |

\* ADD ROD END STYLE (SEE PAGE 1 FOR OPTIONS)

ADDITIONAL STROKE LENGTHS ARE AVAILABLE IN .50" INCREMENTS

ALL PORTS 1/4-18 STANDARD PIPE TAP

Phone: (888) 654-9353

www.resistanceweldsupplies.com

PAGE 6