


A MOUNT CYLINDERS (4.50" - 6.00" BORE) (HEAVY DUTY)

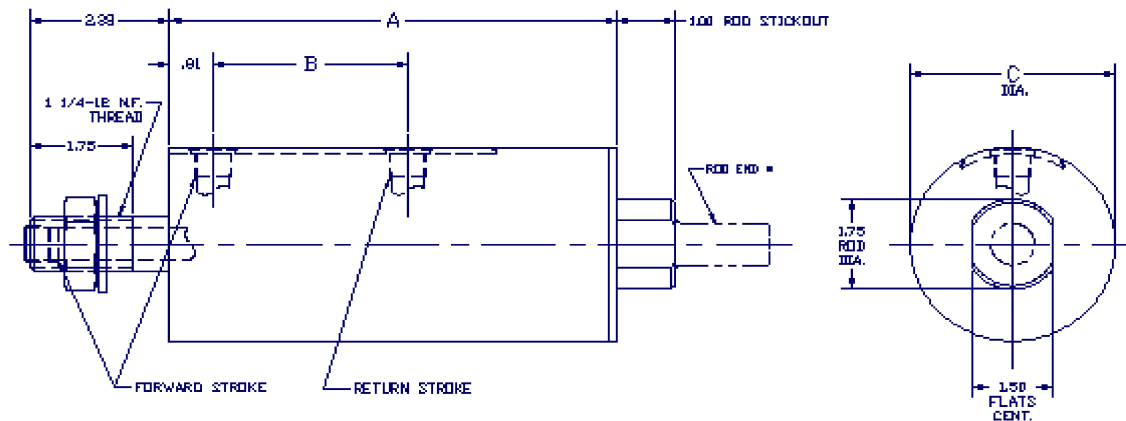

DUAL PISTON CYLINDERS					PISTON AREA	
MODEL NO.	STROKE	A	B	C	EXT.	RET.
AC-A-G-3030-4*	1.00	7.38	3.25	5.00	30.58 SQ. IN.	14.68 SQ. IN.
AC-A-G-3030-6*	1.50	8.38	3.75			
AC-A-G-3030-8*	2.00	9.38	4.25			
AC-A-G-3030-12*	3.00	11.38	5.25			
AC-A-G-3030-16*	4.00	13.38	6.25			
AC-A-G-3030-20*	5.00	15.38	7.25			
AC-A-G-3030-24*	6.00	17.38	8.25			
AC-A-G-3770-4*	1.00	7.38	3.25	5.50	38.04 SQ. IN.	18.41 SQ. IN.
AC-A-G-3770-6*	1.50	8.38	3.75			
AC-A-G-3770-8*	2.00	9.38	4.25			
AC-A-G-3770-12*	3.00	11.38	5.25			
AC-A-G-3770-16*	4.00	13.38	6.25			
AC-A-G-3770-20*	5.00	15.38	7.25			
AC-A-G-3770-24*	6.00	17.38	8.25			
AC-A-G-4600-4*	1.00	7.38	3.25	6.00	46.29 SQ. IN.	22.53 SQ. IN.
AC-A-G-4600-6*	1.50	8.38	3.75			
AC-A-G-4600-8*	2.00	9.38	4.25			
AC-A-G-4600-12*	3.00	11.38	5.25			
AC-A-G-4600-16*	4.00	13.38	6.25			
AC-A-G-4600-20*	5.00	15.38	7.25			
AC-A-G-4600-24*	6.00	17.38	8.25			
AC-A-G-5500-4*	1.00	7.38	3.25	6.50	55.32 SQ. IN.	27.05 SQ. IN.
AC-A-G-5500-6*	1.50	8.38	3.75			
AC-A-G-5500-8*	2.00	9.38	4.25			
AC-A-G-5500-12*	3.00	11.38	5.25			
AC-A-G-5500-16*	4.00	13.38	6.25			
AC-A-G-5500-20*	5.00	15.38	7.25			
AC-A-G-5500-24*	6.00	17.38	8.25			

TRIPLE PISTON CYLINDERS					PISTON AREA	
MODEL NO.	STROKE	A	B	C	EXT.	RET.
AC-A-E3-4450-4*	1.00	10.12	3.25	5.00	44.86 SQ. IN.	14.68 SQ. IN.
AC-A-E3-4450-6*	1.50	11.62	3.75			
AC-A-E3-4450-8*	2.00	13.12	4.25			
AC-A-E3-4450-12*	3.00	16.12	5.25			
AC-A-E3-4450-16*	4.00	19.12	6.25			
AC-A-E3-4450-20*	5.00	22.12	7.25			
AC-A-E3-4450-24*	6.00	25.12	8.25			
AC-A-E3-5550-4*	1.00	10.12	3.25	5.50	56.05 SQ. IN.	18.41 SQ. IN.
AC-A-E3-5550-6*	1.50	11.62	3.75			
AC-A-E3-5550-8*	2.00	13.12	4.25			
AC-A-E3-5550-12*	3.00	16.12	5.25			
AC-A-E3-5550-16*	4.00	19.12	6.25			
AC-A-E3-5550-20*	5.00	22.12	7.25			
AC-A-E3-5550-24*	6.00	25.12	8.25			
AC-A-E3-6800-4*	1.00	10.12	3.25	6.00	68.42 SQ. IN.	22.53 SQ. IN.
AC-A-E3-6800-6*	1.50	11.62	3.75			
AC-A-E3-6800-8*	2.00	13.12	4.25			
AC-A-E3-6800-12*	3.00	16.12	5.25			
AC-A-E3-6800-16*	4.00	19.12	6.25			
AC-A-E3-6800-20*	5.00	22.12	7.25			
AC-A-E3-6800-24*	6.00	25.12	8.25			
AC-A-E3-8150-4*	1.00	10.12	3.25	6.50	81.97 SQ. IN.	11.78 SQ. IN.
AC-A-E3-8150-6*	1.50	11.62	3.75			
AC-A-E3-8150-8*	2.00	13.12	4.25			
AC-A-E3-8150-12*	3.00	16.12	5.25			
AC-A-E3-8150-16*	4.00	19.12	6.25			
AC-A-E3-8150-20*	5.00	22.12	7.25			
AC-A-E3-8150-24*	6.00	25.12	8.25			

* ADD ROD END STYLE (SEE PAGE 1 FOR OPTIONS)

ADDITIONAL STROKE LENGTHS ARE AVAILABLE IN .50" INCREMENTS

ALL PORTS 1/2-14 STANDARD PIPE TAP

Phone: (888) 654-9353

www.resistanceweldsupplies.com

PAGE 3